

EGOPREN TAPES



Quality-
Products



Your **expert** for **bonding** and **sealing**


www.ego.de



EGOPREN TAPES



Processing illustration EGOPREN® C1

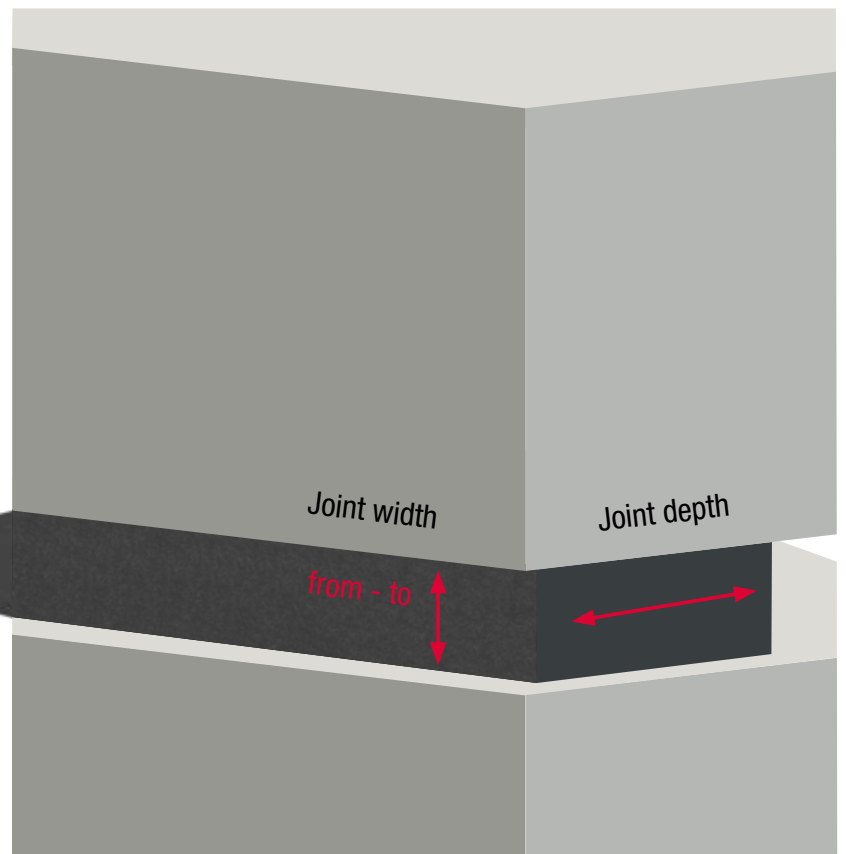

With the existing joint depth,
the product width is used as
orientation for product selection.

The joint width is based on
compression (tape thickness).

EGOPREN® C1

Anwendungsgebiete

Fensteranschluss, Fugenabdichtung

Eigenschaften



Nachweise



Joint width \cong Tape thickness	Joint depth \cong Tape width	Metre per Roll	Rolls per carton	Order number grey	Order number anthracite
1-2 mm	10	12,5 m	30 Rol.	611021070	611021080
	15		20 Rol.	611021570	611021580
	20		15 Rol.	611022070	611022080
2-4 mm	10	13,0 m	30 Rol..	611041070	611041080
	15		20 Rol.	611041570	611041580
	20		15 Rol.	611042070	611042080
3-6 mm	12	12,0 m	25 Rol.	611061270	611061280
	15		20 Rol.	611061570	611061580
4-10 mm	20	8,0 m	15 Rol.	61102070	61102080
	30		10 Rol.	611103070	611103080
	15		20 Rol.	611101570	611101580
5-12 mm	20	5,6 m	5 Rol.	611122070	611122080
	30		10 Rol.	611123070	611123080
	15		20 Rol.	611121570	611121580
6-15 mm	20	4,3 m	15 Rol.	611162070	611162080
	30		10 Rol.	611163070	611163080
	15		20 Rol.	611161570	611161580
9-20 mm	20	3,3 m	15 Rol.	611202070	611202080
	25		12 Rol.	611202570	611202580
	30		10 Rol.	611203070	611203080
13-25 mm	25	2,6 m	12 Rol.	611252570	611252580
	30		10 Rol.	611253070	611253080
	30		10 Rol.	611323070	611323080
15-32 mm	35	3,3 m	8 Rol.	611323570	611323580
	40		7 Rol.	611324070	611324080

* The marked item numbers are available in deviating minimum purchase quantities. EGOPREN® C1 is a pre-compressed sealing tape according to DIN 18542 -BG1- and hardly flammable (B1) according to DIN 4102 (test certificate by the General construction supervision authority is available). It is a sealing tape with one adhesive side, wound up on reels. It is made of polyurethane soft foam with a special acrylate impregnation agent. After positioning, the material expands gradually according to temperature and time and adapts to the width of the joint and to uneven surfaces. The sealing tape is resistant to weather conditions, UV radiation and driving rain according to DIN 18055, it is water vapour permeable and compatible to paints. It is free of CFC and chlorinated compounds. For sealing of outdoor wall joints in building construction, prefabricated concrete construction, timber, masonry, and metal construction.

EGOPREN TAPES

EGOPREN® C1

Joint width \ Joint depth	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	20	24	25	32	40	
10	10/ 1-2 mm																					
15	15/ 1-2 mm																					
20	20/ 1-2 mm																					
10		10/ 2-4 mm																				
15		15/ 2-4 mm																				
20		20/ 2-4 mm																				
12			12/ 3-6 mm																			
15			15/ 3-6 mm																			
20			20/ 3-6 mm																			
15				15/ 4-10 mm																		
20				20/ 4-10 mm																		
30				30/ 4-10 mm																		
15					15/ 5-12 mm																	
20					20/ 5-12 mm																	
30					30/ 5-12 mm																	
15						15/ 6-15 mm																
20						20/ 6-15 mm																
30						30/ 6-15 mm																
20										20/ 9-20 mm												
25										25/ 9-20 mm												
30										30/ 9-20 mm												
25																25/ 13-25 mm						
30																30/ 13-25 mm						
30																	30/ 15-32 mm					
35																		35/ 15-32 mm				
40																			40/ 15-32 mm			



EGOPREN® S

FOAM SEALING TAPE

Areas of application

Spacer (glazing)

Characteristicswässer-
beständig**Certificates**

Nr. 10; 29




Thick-ness	Width	Reels length	VPE	Boxes/pal.	black	white
2 mm	6 mm	10 m	500 m	60 boxes	610200681	610200611
		20 m	1000 m	48 boxes	610200680	610200610
	7 mm	10 m	420 m	60 boxes	610200781	610200711
		20 m	840 m	48 boxes	610200780	610200710
	8 mm	10 m / R.	370 m	60 boxes	610200881	610200811
		20 m / R.	740 m	48 boxes	610200880	610200810
	9 mm	10 m / R.	330 m	60 boxes	610200981	610200911
		20 m / R.	660 m	49 boxes	610200980	610200910
	10 mm	10 m / R.	300 m	60 boxes	610201081	610201011
		20 m / R.	600 m	48 boxes	610201080	610201010
	12 mm	10 m / R.	250 m	60 boxes	610201281	610201211
		20 m / R.	500 m	548 boxes	610201280	610201210
15 mm	10 m / R.	200 m	60 boxes	610201581	610201511	
	20 m / R.	400 m	48 boxes	610201580	610201510	
20 mm	10 m / R.	150 m	60 boxes	610202081	610202011	
	20 m / R.	300 m	48 boxes	610202080	610202010	
3 mm	6 mm	10 m / R.	500 m	60 boxes	610300681	610300611
		20 m / R.	1000 m	48 boxes	610300680	610300610
	8 mm	10 m / R.	370 m	60 boxes	610300881	610300811
		20 m / R.	740 m	48 boxes	610300880	610300810
	9 mm	10 m / R.	330 m	60 boxes	610300981	610300911
		20 m / R.	660 m	48 boxes	610300980	610300910
	10 mm	10 m / R.	300 m.	60 boxes	610301081	610301011
		20 m / R.	600 m	48 boxes	610301080	610301010
	12 mm	10 m / R.	250 m	60 boxes	610301281	610301211
		20 m / R.	500 m	48 boxes	610301280	610301210
	15 mm	10 m / R.	200 m	60 boxes	610301581	610301511
		20 m / R.	400 m	48 boxes	610301580	610301510
20 mm	10 m / R.	150 m	60 boxes	610302081	610302011	
	20 m / R.	300 m	48 boxes	610302080	610302010	
4 mm	8 mm	10 m / R.	370 m	60 boxes	610400881	610400811
		20 m / R.	740 m	48 boxes	610400880	610400810
	9 mm	10 m / R.	330 m	60 boxes	610400981	610400911
		20 m / R.	660 m	48 boxes	610400980	610400910
	10 mm	10 m / R.	300 m	60 boxes	610401081	610401011
		20 m / R.	600 m	48 boxes	610401080	610401010
12 mm	10 m / R.	250 m	60 boxes	610401281	610401211	
	20 m / R.	500 m	48 boxes	610401280	610401210	
5 mm	9 mm	10 m / R.	330 m	60 boxes	610500981	610500911
	10 mm	10 m / R.	300 m	48 boxes	610501081	610501011
	12 mm	10 m / R.	250 m	48 boxes	610501281	610501211
6 mm	9 mm	10 m / R.	330 m	36 boxes	610600981	610600911
	10 mm	10 m / R.	300 m	36 boxes	610601081	610601011
	12 mm	10 m / R.	250 m	36 boxes	610601281	610601211

* The marked item numbers are available in deviating minimum purchase quantities.

EGOPREN® S is a foamed, closed-cell, weather-resistant and plasticiser-free PE tape with one adhesive side. The laminated PE foil is used as separating agent for the adhesive side and thus ensures fast processing without any protective covers needed.



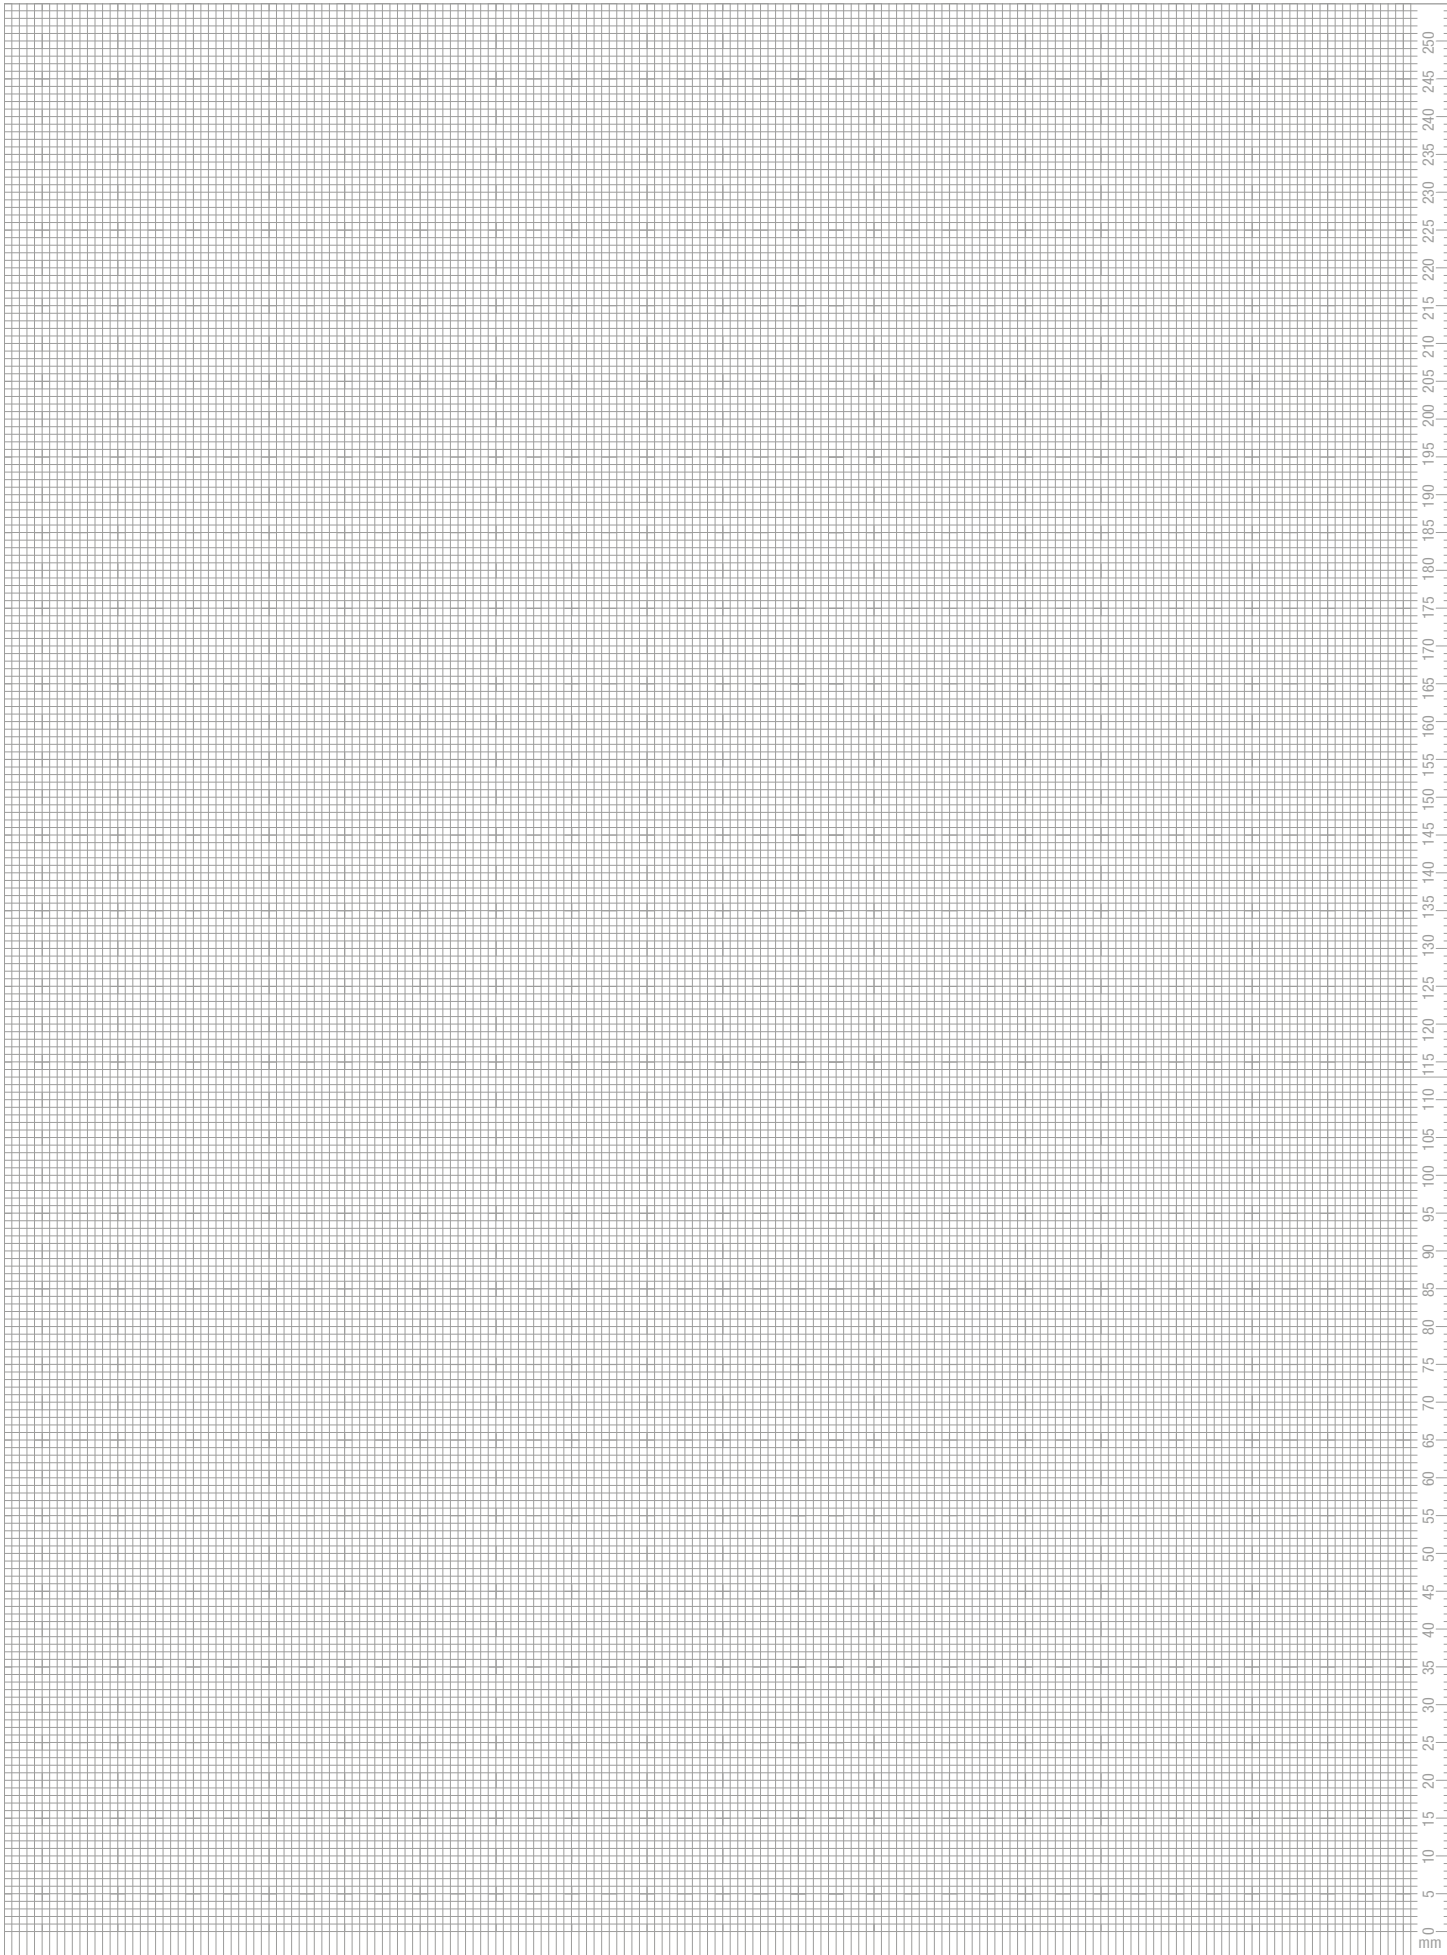

EGO DICHSTOFFWERKE GMBH & CO. BETRIEBS KG

Kaltenbrunn 27 · D-82467 Garmisch-Partenkirchen
Fon +49 (0)8821 95 69 0 · Mail info@ego.de



Quality-
Products



-  Australia
-  Belgium
-  China
-  Finland
-  France
-  Greece
-  New Zealand
-  Netherlands
-  Norway
-  Sweden
-  Switzerland
-  Slovenia
-  Czech Republic
-  UAE

Subject to misprints, technical and sales programme alterations.
Deviations from the original colours are caused by the printing
technology used. Edition 01/2023

www.ego.de



Mitglied im Bundesinnungsverband
des Glaserhandwerks
Mitglied im Industrieverband
Dichtstoffe e.V.
Mitglied des Instituts für
Fensterertechnik e.V. Rosenheim

Our partner in your area