

# ACCESSORIES



Quality-  
Products



Your **expert** for **bonding** and **sealing**



Primer application chart	BUTYL	SILICONE			HYBRID	PUR	ACRYLIC
	EGOBON EGOFERM EGOPOL Serie	EGOSILICON 100 series (Acetate)	EGOSILICON 300 series (Oxim)	EGOSILICON 400 series (Alkoxy)	EGO SMP series	EGOFLEX series	EGOCRYL series
Acrylic glass	✓	*	FML*/HR	FML*/HR	✓/***	✗	✗
Acrylic paint	✓	FML/✓	FML/✓**	FML/✓	✓/***	✓/HR	✓
Alkyd resin paint	✓	✓	✓**	✓	✓/***	HR	✓
Blank aluminium	✓	FML/***	FML/***	FML/***	HR/✓/***	***	✗
Anodised aluminium	✓	FML/✓	FML/✓	FML/✓	HR/✓/***	HR	✗
Powder-coated aluminium	✓	FML/HR	FML/HR	FML/HR	HR/✓/***	HR	✗
Concrete	PRO/ECO	✗	FDF	FDF	FDF/✓/***	PUR	A+H <sub>2</sub> O
Bitumen	PRO	✗	✗	✗	✗	✗	✗
Lead	✓/PRO	✗	FML	FML	HR/***	HR/***	✗
Chromium	✓	✗	FML	FML	✓/HR	✗	✗
DD paint	✓	✓	✓**	✓	✓/***	✓/HR	✓
Dispersion window paint	✓	FML/✓	✓**	✓	✓/***	✓/HR	✓
Dispersion facade paint	✓	✗	FML/FDF/***	FML/FDF/***	✓	✓/HR	✓
Stainless steel (V2A) (V4A)	✓	FML/HR	FML/HR	FML/HR	HR/✓/***	HR	✗
Iron	✓/PRO	✗	FML	FML	HR/***	HR	✗
Enamel	✓	✓	✓	✓	✓	HR	✗
Epoxy resin paint	✓	✓	✓	✓	✓	✓/HR	✗
Fibre cement	PRO/ECO	✗	FDF	FDF	FDF	PUR	A+H <sub>2</sub> O
Glazed tiles	✓	✓	✓	✓	✓	HR	✗
Unglazed tiles	✓/PRO/ECO	✗	FDF	FDF	✓	PUR	✓
Glass	✓	✓	✓	✓	✓	✗	✗
Artificial stone	✓	✗	FDF/***	✗	✓/***	✓/HR/***	✓/A+H <sub>2</sub> O
Copper	✓	✗	FML**	FML	✗	HR/***	✗
Varnish coats	✓	FML	FML/✓	FML/✓	✓	✓/HR	✓
Melamine resin	✓	HR/✓	HR/✓	HR/✓	HR/✓/***	HR	✓
Brass	✓	✗	FML**	FML	HR/***	HR/***	✗
Natural stone	✗	✗	FDF/***	✗	FDF/***	✓/HR/***	✗
Polycarbonate	✓	FML*/HR	FML*/HR	FML*/HR	✓/***	✗	✗
Polyester (FRP)	✓	FML/HR	FML/HR	FML/HR	✓/***	HR	✗
Porous concrete	PRO/ECO	✗	FDF	FDF	FDF/***	PUR	A+H <sub>2</sub> O
Hard PVC	✓	FML	FML	FML	✓/***	PUR	✗
Blank steel	✓	✗	FML	FML	HR/✓/***	HR	✗
Galvanised steel	✓	✗	FML	FML	HR/✓/***	HR	✗
Styrofoam	✓/ECO	✗	✓	✓	✓/***	✗	✓
Zinc sheets	✓	✗	FML	FML	HR/***	HR	✗
Zinc dust paint	✓	✗	FML	FML	✓/***	HR/***	✓

- ✓ = application without primer
- ✗ = application not recommended
- \* = apply a thin coat of primer and ensure fast ventilation, since there is a risk of stress crack corrosion in case of long-term exposure.
- \*\* = leave fission products to thoroughly vent
- \*\*\* = We recommend performing your own tests

- FDF = EGO PRIMER FDF
- FML = EGO PRIMER FML
- PUR = EGO PRIMER PUR
- HR = EGO CONTACT CLEANER
- PRO = EGO BUTYLPRIMER PRO (solvent-based)
- ECO = EGO BUTYLPRIMER ECO (solvent-free)
- A+H<sub>2</sub>O = EGOCRYL Acrylic diluted with water

## EGO CLEANING SPRAY

EGOVIT CLEANING SPRAY  
CONLOC 901 CLEANER

## Area of application

Metal, ceramics, glass, rubber

## Characteristics

Ablüfte-  
zeit  
5 min.

	400 ml spray
Order number	790901760

EGO CLEANING SPRAY can be used as a cleaning and degreasing aerosol for metal, glass, ceramic and rubber. Instructions for use: spray the parts to be cleaned until the dirt and grease are rinsed off or spray on and wipe with a clean, undyed linen or cotton cloth. Repeat the cleaning process if necessary.

For sensitive substrates such as certain plastics, painted surfaces and natural fibre fabrics, test on an unseen area first. Sensitive substrates may be damaged.

## EGO CONTACT CLEANER

PRIMER &amp; CLEANER

## Areas of application

Metal, plastics

## Characteristics

Ablüfte-  
zeit  
10 min.

	500 ml can	5000 ml metal canister
Order number	665260000	665720000

EGO CONTACT CLEANER is especially suitable for improving contact adhesion on predominantly smooth substrates, on metals and plastics, in particular TGIC-free powder coatings.

Instructions for use: Apply EGO CONTACT CLEANER, wipe off with a clean cloth. Then leave the EGO CONTACT CLEANER to flash off for approx. 10 minutes. Always carry out your own tests.

# ACCESSORIES

	500 ml can	3000 ml metal canister	12000 ml metal canister
Order number	681260000	681710000	681740000

**EGO CLEANER PRO** (acetone-based) is especially suitable for quick and thorough cleaning and degreasing of glass, tiles, ceramics, metals, etc.

Instructions for use: wet the parts to be cleaned and wipe with a clean, undyed linen or cotton cloth. Repeat the cleaning process if necessary. For sensitive surfaces such as certain plastics or painted surfaces, test on an unseen area first and carry out your own test in order to rule out material incompatibility.

## EGO CLEANER PRO

EGOVIT®100

### Areas of application

Metal, tiles, glass, ceramics

### Characteristics

**Ablüfte-  
zeit**  
5 min.



	500 ml can	3000 ml metal canister	12000 ml metal canister
Bestellnummer	790902260	790902710	790902740

**EGO CLEANER SOFT** (acetone-based) is especially suitable for gentle and thorough cleaning and degreasing of glass, tiles, ceramics, natural stone, synthetic material, lacquered metals, etc. Instructions for use: wet the parts to be cleaned and wipe with a clean, undyed linen or cotton cloth. Repeat the cleaning process if necessary. For sensitive surfaces such as certain plastics or painted surfaces, test on an unseen area first and carry out your own test in order to rule out material incompatibility.

## EGO REINIGER SOFT

CONLOC®902

### Areas of application

Metal, ceramics, glass, rubber

### Characteristics

**Ablüfte-  
zeit**  
5 min.



## EGO PRIMER FDF

## EGOCON FDF

## Areas of application

Concrete, facade, tiles, natural stone

## Characteristics

**Ablüf-  
zeit  
30 min.**



	100 ml bottle	500 ml can	5000 ml metal canister
Order number	660640300	660260300	660720300

EGO PRIMER FDF is a ready-to-use primer (non-discolouring) for improvement of contact adhesion of EGOSIL ADHESIVE, EGOSILICONE and SMP polymers, preferably on marble, artificial and natural stone.



# ACCESSORIES

	100 ml bottle	500 ml can	5000 ml metal canister
Order number	662640000	662260000	662720000

EGO PRIMER FML is a ready-to-use primer for improvement of contact adhesion of EGO-SILICONE on any kinds of metal, plastics, such as acrylic glass, polycarbonate, hard PVC, polyester and coats such as varnishes and facade paints, etc.

## EGO PRIMER FML

EGOCON 790

### Areas of applicati

Acrylic glass, polycarbonate, polyester, hard PVC, varnishes, facade paint

### Characteristics

**Ablüfte-  
zeit**  
30 min.



	1000 ml Aluminium bottle
Order number	654290000

EGOPRIMER PUR is a ready-to-use primer for improvement of contact adhesion of EGOFLEX sealants on porous and absorbent substrates.

## EGO PRIMER PUR

EGOPRIMER 400R

### Areas of application

EGOFLEX

### Characteristics

**Ablüfte-  
zeit**  
30 min.



## EGO BUTYLPRIMER PRO

## EGO CONTACT ADHESIVE

## Areas of application

Concrete, timber, masonry, plaster, porous concrete, chipboards, gypsum fibre boards

## Characteristics

**Ablüftezeit**  
10 min.



	500 ml can	5000 ml metal canister
Order number	670260000	670720000

EGO BUTYLPRIMER PRO for porous and problematic substrates, such as concrete, bitumen, raw iron, natural stone, porous concrete and the like. This product is only suitable for butyl-based products.

## EGO BUTYLPRIMER ECO

## CONTACT ADHESIVE LF

## Areas of application

Universal use

## Characteristics

**Löse-  
mittel  
frei** **Ablüfte-  
zeit  
30 min.**

## Certificates



	2000 ml PE bucket	5000 ml PE canister
Order number	670300070	670720070

EGO BUTYLPRIMER ECO is a ready-to-use, solvent-free, permanently adhesive and moisture-resistant adhesive primer for pre-treatment of porous and non-porous substrate materials. For priming and improvement of contact adhesion of butyl tapes, bitumen tapes and acrylate adhesive tapes or adhesive foils. The product can be specifically used for achieving secure and fast adhesion of EGO butyl tapes on porous materials. May also be used for pre-treatment of adhesion surfaces in roofing and as an aid for window installation.



# ACCESSORIES

EGO SMOOTHING AGENT ORIGINAL	500 ml PE can	5000 ml canister
Order number	680260000	680720000
EGO SMOOTHING AGENT CONCENTRATE	1000 ml bottle	
Order number	680701000	

EGO SMOOTHING AGENT is a gentle smoothing agent for silicone, SMP-Hybrid, polymer, polyurethane and acrylic sealants. We recommend thinning the EGO SMOOTHING AGENT standard with clean water in a ratio of 1:4 to max. 1:5. EGO SMOOTHING AGENT (concentrate) must be thinned with water at a ratio of 1:100; i.e. 3 bottle caps or concentrate thinned in 1 litre of clean water.

## EGO SMOOTHING AGENT ORIGINAL / CONCENTRATE

### Areas of application

EGO SMOOTHING AGENT ORIGINAL EGO SMOOTHING AGENT CONCENTRATE  
EGOSILICON, EGOFLEX, EGOCRYL, EGO SMP Joints

### Characteristics

Ver-  
hältnis  
1:4

### Characteristics

1:100  
Verhältnis



SMOOTHING AGENT  
CONCENTRATE



SMOOTHING AGENT



	500 ml PE can	5000 ml PE canister
Order number	636260000	636720000

EGO STONE SMOOTHING AGENT is a special smoothing agent for marble and natural stone. Particularly suitable for EGOSILICON 351 NATURAL STONE silicone and EGOSILICON 352 textured surface. Only use EGO STONE SMOOTHING AGENT as andiluted product. Always use fresh EGO SMOOTHING AGENT (prevent contamination with sealant) and use the products sparingly. Immediately remove any excess EGO SMOOTHING AGENT, do not leave to dry.

## EGO STONE SMOOTHING AGENT SPECIAL

### Areas of application

EGOSILICON 351, EGOSILICON 352

### Characteristics

5:3  
Naturstein



## EGOFÜLL PE

## BACKFILLING

## Areas of application

Backfilling of joints

## Characteristics

Weich-  
macher  
frei

PE

DIN

according to  
DIN 18540

	Order number	Ø	Length	Delivery form	(m/box)/(boxes/pal.)
grey	603006073	6 mm	100 m	Wrapped bundle	500 m/6 box
grey	603008073	8 mm	100 m	Wrapped bundle	500 m/6 box
grey	603010073	10 mm	100 m	Wrapped bundle	500 m/6 box
grey	603013073	13 mm	100 m	Wrapped bundle	500 m/6 box
grey	603015073	15 mm	100 m	Wrapped bundle	500 m/6 box
grey	603020073	20 mm	50 m	Wrapped bundle	250 m/6 box
grey	603025073	25 mm	50 m	Wrapped bundle	250 m/6 box
grey	603030073	30 mm	25 m	Wrapped bundle	125 m/6 box
grey	603040072 *	40 mm	2 m	Rod	270 m/6 box
grey	603050072 *	50 mm	2 m	Rod	180 m/6 box

\* The marked item numbers are available in deviating minimum purchase quantities. EGOFÜLL PE is a closed-cell, foamed, weather-resistant and plasticiser-free PE roand profile. It can be pressed in and is not water-absorbent. Excellent resistance to oils, grease, diluted lyes, salt water and washing detergents, as well as aromatic and chlorinated hydrocarbons. For backfilling of connection and construction joints, e.g. for jointing according to DIN 18540 and the like.

## EGOFÜLL PE HOLLOW

	Order number	Ø	Length	Delivery form	(m/box)/(boxes/pal.)
grey	603015079 *	15 mm	550 m	Wrapped bundle	550 m/12 box
grey	603020079 *	20 mm	350 m	Wrapped bundle	350 m/12 box
grey	603025079 *	25 mm	200 m	Wrapped bundle	200 m/12 box
grey	603030079 *	30 mm	160 m	Wrapped bundle	160 m/12 box

\* The marked item numbers are available in deviating minimum purchase quantities.

## EGOFÜLL PUR

## BACKFILLING

## Areas of application

Backfilling of joints

## Characteristics

Weich-  
macher  
frei

PUR



	Order number	Ø	Length	Delivery form	(m/box)/(boxes/pal.)
grey	602010004	10 mm	1000 mm	lose im Kar.	1500 m/6 box
yellow	602010005				
grey	602015004	15 mm	1000 mm	lose im Kar.	1000 m/6 box
yellow	602015005				
grey	602020004	20 mm	1000 mm	lose im Kar.	500 m/6 box
yellow	602020005				
grey	602025004 *	25 mm	1000 mm	lose im Kar.	350 m/6 box
yellow	602025005				
grey	602030004	30 mm	1000 mm	lose im Kar.	250 m/6 box
yellow	602030005				
grey	602040004 *	40 mm	1000 mm	lose im Kar.	150 m/6 box
yellow	602040005				
grey	602050004 *	50 mm	1000 mm	lose im Kar.	100 m/6 box
yellow	602050005 *				

\* The marked item numbers are available in deviating minimum purchase quantities. EGOFÜLL PUR is an easily compressible, open-cell and plasticiser-free roand cord made of polyurethane foam. For backfilling of connection and construction joints, for indoor applications. Not permitted for backfilling of joint seals in building construction joints according to DIN 18540.

## ACCESSORIES

	Order number	Dimensions	Length	(m/box)/(boxes/pal.)
beige	605012010 *	12 mm	20 m	20 m/30 boxes
beige	605020010 *	20 mm	20 m	20 m/30 boxes
beige	605030010 *	30 mm	20 m	20 m/30 boxes
beige	605040010 *	40 mm	20 m	20 m/30 boxes
beige	605050010 *	50 mm	20 m	20 m/30 boxes
beige	605060010 *	60 mm	20 m	20 m/30 boxes

\* The marked item numbers are available in deviating minimum purchase quantities.

**EGOFÜLL FIRE PROTECTION CORD** is a flexible joint cord on the basis of mineral fibres with glass fibre fabrics woven around. **EGOFÜLL FIRE PROTECTION CORDS** are used in expansion and movement joints in building construction, underground construction and tunnel construction and prevent passage of fire and gasses for up to 240 minutes. Test certificates by the General construction supervision authority are available.

**EGOFÜLL FIRE PROTECTION** EGO FIRE PROTECTION CORD**Areas of application**

Backfilling of joints

**Characteristics****Certificates**

## EGOFIX PROMO

## Characteristics



Sealing devices for sealants	Standard application	Order number
EGOFIX PROMO	310 ml	590036006

The EGOFIX PROMO cartridge gun is excellently suitable for processing of EGO cartridges. The practical rubber-lined handle and the perfectly adjusted trigger ensure ergonomic and comfortable working. The powerful pusher simultaneously ensures increased compressive strength of the feed mechanism. The release hook can be easily grabbed and set in position. The EGOFIX PROMO complies with all requirements for a stable and high-quality cartridge gun. The exclusive EGO design is only available from EGO.

## EGOFIX FX

## Characteristics



Sealing devices for sealants	Standard application	Order number
EGOFIX FX 90	310 ml	590036790
EGOFIX FX 40	400 ml	590036740 *
EGOFIX FX 60	600 ml	590036760

\* The marked item numbers are available in deviating minimum purchase quantities. The EGOFIX FX series is excellently suitable for processing of EGO cartridges and foil bags. The practical rubber-lined handle and the perfectly adjusted trigger ensure ergonomic and comfortable working. The powerful pusher simultaneously ensures increased compressive strength of the feed mechanism. The release hook can be easily grabbed and set in position. The EGOFIX FX series complies with all requirements for a stable and high-quality sealing device.

# ACCESSORIES

Sealing devices for sealants	Standard application	Order number
EGOFIX EXCEPT 310	310 ml	590036831
EGOFIX EXCEPT 400	400 ml	590036840 *
EGOFIX EXCEPT 600	600 ml	590036860


\* The marked item numbers are available in deviating minimum purchase quantities. The EGOFIX EXCEPT series is excellently suitable for processing of EGO cartridges and foil bags. The practical rubber-lined handle and the perfectly adjusted trigger ensure ergonomic and comfortable working. It ensures professional jointing thanks to the tailing stop function that can be activated. The sintered pusher block ensures high compressive strength of the feed mechanism. The corrosion-protection special alloy ensures long service life. The release hook can be easily grabbed and set in position. The integrated dosing nozzle blade is a practical feature that helps in cutting the cartridges open during daily work. The improved transmission ratio ensures good pressing of material at low pressure. The EGOFIX EXCEPT series complies with all requirements for a stable and high-quality sealing device.

Sealing devices for sealants		Order number
EGOFIX POWERJET	600 ml	590083860 *
Charger	-	590083866 *
Spare rechargeable battery	-	590083865 *

\* The marked item numbers are available in deviating minimum purchase quantities. The EGOFIX POWERJET is excellently suitable for processing of foil bags for professional sealing. The practical rubber-lined handle and the infinitely variable feed trigger ensure comfortable working. The automatic return function ensures professional jointing in transition areas of joints. The integrated LED light ensures good lighting of poorly lit working areas. The optionally available spare rechargeable batteries and chargers ensure professional working and parallel charging of other batteries. Thanks to its outstanding handling features, the EGOFIX POWERJET complies with the highest requirements for battery-operated sealing devices.

## EGOFIX EXCEPT

### Characteristics



## EGOFIX POWERJET

### Characteristics



## EGOFIX AIRJET

## Characteristics

**6-10 bar** **Druck-luft**



EGOFIX AIRJET KB 600

**1k** **400 ml** **600 ml**  
System Gebinde Gebinde  
**310 ml** **50 mm**  
Gebinde Gebinde



EGOFIX AIRJET KB 400

**310 ml** **400 ml** **1k**  
Gebinde Gebinde System



EGOFIX 2K-AIRJET DLP 750

**2k** **1:1** **4-8 bar**  
System Verhältnis  
**3,3 kN** **190 ml** **310 ml**  
Gebinde Gebinde

Sealing devices for sealants	Standard application	Order number
EGOFIX AIRJET KB 600	600 ml	590090600 *
EGOFIX AIRJET KB 400	400 ml	590090400 *
EGOFIX 2K-AIRJET DLP 750	190ml/310ml	590038000 *

\* The marked item numbers are available in deviating minimum purchase quantities. The EGOFIX AIRJET and EGOFIX 2K-AIRJET is excellently suitable for processing of EGO cartridges and foil bags for professional and industrial sealing. The variable working pressure between 6 and 10 bar and minimum air consumption ensure efficient operation. The optimally positioned gravity point and the anodised aluminium tube ensure practical and long-term use. The pressure relief valve has a quick reaction time.

## EGOFIX PUTTY GUN

## Characteristics

**20 bar** **Druck-luft** **70 mm**  
Gebinde



Sealing devices for sealants	Standard application	Order number
EGOFIX KITT-PRESSE	70 mm billets	501001000
Nozzle set	4 pcs.	501201000 *
Two-way valve	Attachment	501101000 *

\* The marked item numbers are available in deviating minimum purchase quantities. Thanks to the robust design of the EGOFIX PUTTY GUN it is suitable for 2.5 kg putty content (filled from buckets or packed in billets) with a diameter of 70 mm. The application pressure must be maximum 20 bar, which makes the gun suitable for viscous-plastic glazing putties.

The EGOFIX PUTTY GUN consists of a cylinder with securing ring and a piston (the securing ring prevents unwanted ejection of the piston). Two-way valve with quick-acting coupling and hose connection. 1 nozzle head, 1 set of nozzles (= 4 pcs.) with various nozzle cross sections, special nozzles available on request.

# ACCESSORIES

Sealing devices for EGOPOXID adhesives	Standard application	Order number
EGOFIX 2K-POXIDPRESS 1:1 und 2:1	EGOPOXID 200ml	590080000
EGOFIX 2K-PRESS HPD 900 1:1	EGOFLEX 471	590004000 *

\* The marked item numbers are available in deviating minimum purchase quantities.

Robust sealing unit for 200 ml 2-part EGOPOXID adhesive cartridges. Allows for time and material-saving dosing and ensures precise mixing.

Mixing ratio 1:1 and 2:1.

High-quality sealing unit for 2-component EGOFLEX adhesive cartridges. Allows for time and material-saving dosing and ensures professional finishing.

Mixing ratio 1:1

Sealing devices for EGOPOXID adhesives	Standard application	Order number
EGOFIX 2K-POXIDPRESS 1:1 und 2:1	EGOPOXID 50 ml	590079000 *
EGOFIX 2K-POXIDPRESS 1:1 und 2:1	EGOPOXID 50 ml	570000905

\* The marked item numbers are available in deviating minimum purchase quantities.

EGOFIX 2K-POXIDPRESS 1:1 and 2:1 (590079000)

Robust sealing unit for 50 ml 2-part EGOPOXID adhesive cartridges. Allows for time and material-saving dosing and ensures precise mixing.

Mixing ratio 1:1 and 2:1.

EGOFIX 2K-POXIDPRESS 1:1 and 2:1 (570000905)

Tried and tested light sealing unit for 50 ml 2-part EGOPOXID adhesive cartridges. Allows for time and material-saving dosing and ensures precise mixing.

Mixing ratio 1:1 and 2:1 incl. combi push rod.

## EGOFIX 2K-POXIDPRESS

### Characteristics




## EGOFIX 2K-POXIDPRESS

### Characteristics



System	Product	Order number
POXID 50 ml	FIX 2K-REPLACEMENT PLUNGER [1:1]/[2:1]	570000900
POXID 50 ml	FIX 2K-REPLACEMENT PLUNGER [1:1]	570000910

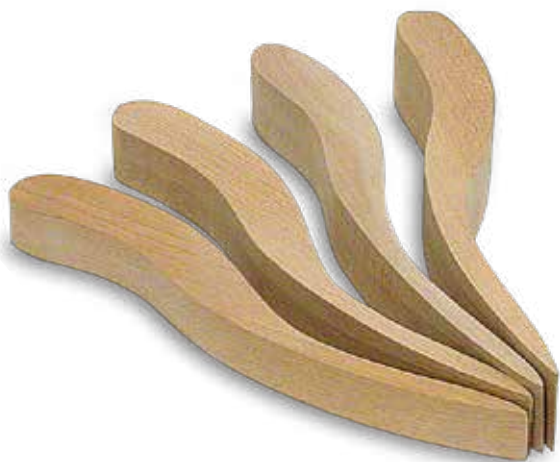**WOODEN SMOOTHING SPATULAS**

Item	Format/size	Order number
Wooden smoothing spatulas	6 mm	570017000
Wooden smoothing spatulas	8 mm	570018000
Wooden smoothing spatulas	10 mm	570019000
Wooden smoothing spatulas	15 mm	570020000
Wooden smoothing spatulas	20 mm	570021000
Wooden smoothing spatulas	25 mm	570022000
Wooden smoothing spatulas	30 mm	570023000
Wooden smoothing spatulas	35 mm	570024000
Wooden smoothing spatulas	40 mm	570025000

\* The marked item numbers are available in deviating minimum purchase quantities.

**SMOOTHING RUBBER, SMOOTHING MASTER KIT**

Item	Format/size	Order number
Smoothing rubber „Glättfix“	oval	570014000
Smoothing rubber „Glättfix Expert“	oval	570032000
Smoothing rubber „square“ PALÜ	square	590015000
Smoothing master kit	11-17 mm	590002020

\* The marked item numbers are available in deviating minimum purchase quantities.



## ACCESSORIES

System	Item	Order number	Packaging unit
310 ml cartridge	FIX 1C NOZZLE STANDARD	022000117	1 pcs
310 ml cartridge	FIX 1C NOZZLE STANDARD	022000114	10 pcs
310 ml cartridge	FIX 1C NOZZLE STANDARD	022000112	20 pcs
310 ml cartridge	FIX 1C LONG NOZZLE	022000111	1 pcs
310 ml cartridge	FIX 1C CLIP NOZZLE V-SEAM	022000118	1 pcs
310 ml cartridge	FIX 1C CLIP NOZZLE WHITE	022000123	1 pcs
310 ml cartridge	FIX 1C CLIP NOZZLE WHITE/RED (LID)	022000192	1 pcs
310 ml cartridge	FIX 1C NOZZLE WHITE/RED TURNABLE	570000930	1 pcs
310 ml cartridge	FIX 1C NOZZLE 45° JOINT ANGLE PIECE	570003605	1 pcs
400 & 600 ml foil bag	FIX 1C FUNNEL NOZZLE WHITE	022000115	1 pcs
400 & 600 ml foil bag	FIX 1C FUNNEL NOZZLE YELLOW 45° ANGLE	590016000	1 pcs

## NOZZLES

1C



System	Item	Order number
POXID 10 ml	FIX 2C MIXING PIPE	570000919
POXID 50 ml	FIX 2C MIXING PIPE	570000901
POXID 50 ml	FIX 2C MIXING PIPE (FOR CHANGEABLE TIPS)	570000902
POXID 50 ml	FIX 2C CHANGEABLE TIPS	570000903
POXID 200 ml	FIX 2C MIXING PIPE	570000906

## MIXING TUBES

2C





# FOR THE SAKE OF THE ENVIRONMENT

**Our catalogue on the web**

**[www.ego.de/shop](http://www.ego.de/shop)**

All the items in our catalogue are easy to find on our webshop as well. And the advantage of the webshop: You will find your price and availability of each item.





EGO DICHSTOFFWERKE GMBH & CO. BETRIEBS KG

Kaltenbrunn 27 · D-82467 Garmisch-Partenkirchen  
 Fon +49 (0)8821 95 69 0 · Mail info@ego.de



Quality-  
 Products



-  Australia
-  Belgium
-  China
-  Finland
-  France
-  Greece
-  New Zealand
-  Netherlands
-  Norway
-  Sweden
-  Switzerland
-  Slovenia
-  Czech Republic
-  UAE

Subject to misprints, technical and sales programme alterations.  
 Deviations from the original colours are caused by the printing  
 technology used. Edition 01/2023

[www.ego.de](http://www.ego.de)



Mitglied im Bundesinnungsverband  
 des Glaserhandwerks  
 Mitglied im Industrieverband  
 Dichtstoffe e.V.  
 Mitglied des Instituts für  
 Fenstertechnik e.V. Rosenheim

Our partner in your area