

# SILICONE



Quality-  
Products



Your **expert** for **bonding** and **sealing**



# SILICONE SEALANTS

## SILICONE

For more than 50 years, EGO has been producing high-quality, user-friendly silicone sealants that are vulcanised to form elastic end products. Due to their excellent properties, EGOSILICONES are the solution for many sealing and bonding problems. All products are characterised by excellent adhesion, maximum aging resistance and utmost resistance to UV, weather and chemicals.

### Curing systems

EGOSILICONES are available in a variety of curing systems. The 100 series is acetoxy-curing, splits off low amounts of acetic acid during vulcanisation and thus is an acidic system. The 300 series is oxim-curing, splits off low amounts of oxim during vulcanisation and thus is a chemically neutral system. The 400 series and the mirror and painted glass adhesives are alkoxy-curing, split off low amounts of alcohol during vulcanisation and thus are chemically neutral systems.

### Colour variety

Through application of online-controlled colouring plants based on multi-component dosing technology, we have the possibility of producing silicone sealants in almost any desired colour or shade.

### Flexibility in container sizes

Our production department is highly flexible with regard to container sizes. In addition to delivery of standard containers (cartridges of 300 ml and 310 ml as well as foil bags of 400 ml and 600 ml), we also offer delivery of various containers, such as barrels, tubes, spray cans, or special options, if required.

### Environmental friendliness

In production, it is a matter of course for us to account for environmental protection requirements through implementation of state-of-the-art processes. In addition, most of our EGOSILICONES meet the VOC requirements as per AgBB and/or as per LEED (Leadership In Energy and Environmental Design).

	Curing system			Special characteristics							Special application cases											
	Acidic (acetoxy) curing	Neutral (oxim) curing	Neutral (alkoxy) curing	Abrasion-resistant	Capable of bearing paints/coats (DIN 52452-4 A1)	Fungicidal	Odorless	High temperature-resistant	Food-compatible	Surface structure	Hardly inflammable	Aquarium	Connection and expansion joints	Window sealing DIN 18545	Glass facades / Iso and VSG glass	Glass sealing	Natural stone	Clean room	Sanitary joints	Swimming pool	Mirrors	
EGOSILICONE 100	✓				✓							✓			✓							
EGOSILICONE 110	✓				✓							✓			✓							
EGOSILICONE 111	✓				✓				✗			✓	✓		✓							
EGOSILICONE 120	✓				✓			✓					✓		✓							
EGOSILICONE 151	✓			✓	✓	✓						✓	✓		✓				✓			
EGOSILICONE 191	✓				✓	✓							✓		✓				✓			
EGOSILICONE 300		✓		✗	✓	②						✓	✓		✓				✗			
EGOSILICONE 310		✓			✓	✓					✗		✓		✓				✗			
EGOSILICONE 333		✓		✓	✓							✓		✗	✓							
EGOSILICONE 351		✓			✓	✓							✓			✓	✗		✓			
EGOSILICONE 352		✓		✓	✓	✓				✓			✓			✓						
EGOSILICONE 360		✓		✗	✓	②						✓	✓		✓				✗			
EGOSILICONE 365		✓		✓	✓	✓						✓	✓		✓	✓			✓	✓		
EGOSILICONE 460			✓	✓	✓	✓	✓					✓	✗		✓				✗			
MIRROR PAINTED GLASS ADHESIVE			✓		✓		✓								✓							✓

✓ is available ✗ Test certificate ① transparent abrasion-resistant ② coloured fungicidal

## EGOSILICONE 100

ORIGINAL



**Areas of application**  
Glass, aluminium, plastics

**Characteristics**


**Certificates**

  No. 10; 31; 35

 DIN EN ISO 11600 G 25 LM  
DIN EN 15651-1 F 25 LM EXT-INT-CC  
DIN EN 15651-2 G 25 LM CC



	310 ml Cartridge	600 ml Foil bag
 0 742832 835305		
transparent	310140300	310370300
white	310141000 *	310371000 *
aluminium	310147100 *	310377100 *
black	310148000	310378000 *
(pcs./box) / (boxes/pal.)	20 pcs./60 boxes	20 pcs./30 boxes

\* The marked item numbers are available in deviating minimum purchase quantities. EGOSILICONE 100 is a ready-to-use, high-quality single-component silicone sealant that vulcanises through reaction with air humidity to form an elastic end product (free from fungicidal agents).

Glass sealing, aluminium, tension-free plastics, e.g. hard PVC, acrylic, poly-carbonate, ABS. Do not use on alkaline substrates, such as concrete.

## EGOSILICONE 110

AQUARIUM



**Areas of application**  
Fish tanks, display cabinets

**Characteristics**


   

**Certificates**

  DIN 32622  
DIN EN ISO 11600 G 25 HM


 No. 35 

	310 ml Cartridge
 0 742832 835329	
transparent	311140300 *
black	311148000 *
(pcs./box) / (boxes/pal.)	20 pcs./60 box

\* The marked item numbers are available in deviating minimum purchase quantities. EGOSILICONE 110 is a ready-to-use, high-quality single-component silicone sealant that vulcanises through reaction with air humidity to form an elastic end product (free from fungicidal agents).

Bonding of frameless fish tanks (DIN 32622), full glass structures.

# SILICONE SEALANTS

 0 7 4 2 8 3 2 8 3 5 2 8 2	310 ml Cartridge
transparent	313140300
grey	313147000
black	313148000
(pcs./box) / (boxes/pal.)	20 pcs./60 box

\* The marked item numbers are available in deviating minimum purchase quantities. EGOSILICONE 111 is a tested single-component silicone sealant, free from fungicidal agents, that vulcanises through reaction with air humidity and with minimum split-off of acetic acid to form an elastic end product.

Preferably suitable for sealing of connection and expansion joints in factories operating in production, storage and processing of food. Can be used, for example, for jointing in canteen/industrial kitchens, dairy factories, beverage companies, abattoirs, cold storage warehouses and in shop fitting. Direct food contact with EGOSILICONE 111 is non-objectionable and safe. Can also be used for bonding of full-glass fish tanks.

## EGOSILICONE 111

FOOD & DRINKING WATER

### Areas of application


Food, drinking water

### Characteristics



### Certificates



 0 7 4 2 8 3 2 8 3 5 3 3 6	310 ml Cartridge
black	312148000
(pcs./box) / (boxes/pal.)	20 pcs./60 box

\* The marked item numbers are available in deviating minimum purchase quantities. EGOSILICONE 120 is a ready-to-use, high-quality single-component silicone sealant that is free from plasticisers and vulcanises through reaction with air humidity to form an elastic end product.

Elastic seal under high temperature stresses, fire-retardant special glazing, sealing of boilers and furnaces, heat exchangers, and the like.

## EGOSILICONE 120

HIGH TEMPERATURE

### Areas of application

High temperature

### Characteristics



### Certificates



## EGOSILICONE 151

## SANITARY PROFESSIONAL



**Areas of application**  
Sanitary, glass, enamel  
stainless steel, timber, tiles

**Characteristics**

- Essig vernetzend
- Löse-mittel frei
- Fungizid
- abriebfest
- Weich-macher frei

**Certificates**

- CE
- AgBB
- LEED® EQ c4.1
- A+ VOC-Klasse
- EMICODE® EC1
- IVD Merkblatt No. 3-1; 3-2; 10; 14; 29; 31; 35
- DIN DIN EN ISO 11600 G 25 LM; DIN EN ISO 11600 F 25 LM; DIN EN 15651-1 F 25 LM EXT-INT-CC; DIN EN 15651-2 G 25 LM CC; DIN EN 15651-3 XS1
- Umwelt-produkt-Deklaration EPD
- DGNB



	310 ml Cartridge	400 ml Foil bag
		
transparent	318140300	318380300 *
milky-transparent	318140305	318380305 *
white	318141000	318381000 *
traffic white	318141634 *	318381634 *
joint white	318141070 *	318381070 *
chinchilla	318141870 *	318381870 *
mist	318149390 *	318389390 *
light grey	318143671 *	318383671 *
grey white	318141470 *	318381470 *
joint grey	318149670 *	318389670 *
silver grey	318149470 *	318389470 *
silk grey	318147570 *	318387570 *
manhattan	318142670 *	318382670 *
flannel grey	318147270 *	318387270 *
sanitary grey	318149770 *	318389770 *
agate grey	318149500 *	318389500 *
stone grey	318147070 *	318387070 *
grey	318147770	318387770 *
concrete grey	318147470 *	318387470 *
anthracite	318148170 *	318388170 *
pergamon	318141970 *	318381970 *
bahama beige	318146170 *	318386170 *
anemone	318142370 *	318382370 *
jasmine	318142270 *	318382270 *
(pcs./box) / (boxes/pal.)	20 pcs./60 box	20 pcs./60 box

\* The marked item numbers are available in deviating minimum purchase quantities.


EGOSILICONE 151 is a ready-to-use, extremely high-quality, abrasion-resistant and plasticiser-free single-component silicone sealant with best processing characteristics that vulcanises through reaction with air humidity to form an elastic end product.

EGOSILICONE 151 is resistant to chemicals (diluted acids and lyes, household cleaning agents and the like), fungicidal and waterproof with optimum skin-forming time and secure vulcanisation; it ensures excellent processing characteristics and very good modeling and smoothing properties.

Permanent high-quality sealing in the fields of construction and sanitary applications. For sealing, edge and connection joints in glass, ceramics, porcelain, enamel, tiles, aluminium, stainless steel, polyacrylate, polycarbonate, polyester, hard PVC and timber.



# SILICONE SEALANTS

	300 ml Cartridge	400 ml Foil bag
 0 742832 835220		
transparent	315130300	315380300 *
milky-transparent	315130305 *	315380305 *
white	315131000	315381000
sanitary white	315131001	315381001 *
joint white	315131070 *	315381070 *
chinchilla	315131870 *	315381870 *
mist	315139390 *	315389390 *
light grey, bright	315139600	315389600
light grey	315139671 *	315389671
grey white	315131470 *	315381470 *
joint grey	315139670	315389670
silver grey	315139470	315389470 *
silk grey	315137570 *	315387570
manhattan	315132670	315382670
flannel grey	315137270	315387270
mortar grey	315139100 *	315389100
sanitary grey	315139770	315389770
agate grey	315139500 *	315389500 *
stone grey	315137070 *	315387070 *
grey	315137770 *	315387770 *
concrete grey	315137470 *	315387470
anthracite	315138170	315388170
black	315138000 *	315388000 *
jasmine	315132270	315382270 *
pergamon, bright	315131971 *	315381971 *
pergamon	315131970 *	315381970 *
sahara	315132200 *	315382200 *
anemone	315132370 *	315382370 *
bahama beige	315136170 *	315386170 *
chocolate brown	315136600 *	315386600 *
espresso	315136000	315386000 *
mocca	315135800 *	315385800 *
(pcs./box) / (boxes/pal.)	20 pcs./60 box	20 pcs./60 box

\* The marked item numbers are available in deviating minimum purchase quantities. **EGOSILICONE 191** is a ready-to-use, premium-quality single-component silicone sealant that vulcanises through reaction with air humidity to form an elastic sealant. The special formulation of **EGOSILICON 191** ensures the following benefits:

- excellent processing and smoothing properties
- thus, outstanding joint filling performance
- water-proof
- fungicidal characteristics
- optimum skin-forming time, quick through-hardening
- large number of colour options, adapted to sanitary ceramics and joint fillers

## EGOSILICONE 191

SANITARY SEAL

### Areas of application

Sanitary

### Characteristics



### Certificates



## EGOSILICONE 300

## CONSTRUCTION SEALANT




## Areas of application

Glass, concrete, plaster, masonry, metal, plastics

## Characteristics



## Certificates



\* The marked item numbers are available in deviating minimum purchase quantities.

EGOSILICONE 300 is a ready-to-use, high-quality single-component silicone sealant that vulcanises through reaction with air humidity to form an elastic end product. The product is coloured, has fungicidal properties and is free of 2 methylkethyl ketone oximes (MEKO) and methylisobuthyl ketone oximes (MIBKO).

Glass sealing, connection and expansion joints, concrete, plaster, masonry, metals, tension-free plastics and painted/varnished timber.

For abrasion-resistant jointing use EGOSILICONE 360.

	310 ml Cartridge	600 ml Foil bag
transparent	330140300	330370300
white	330141000	330371000
traffic white	330141670	330371670 *
cream white	330141500 *	330371500 *
grey white	330141400	330371400 *
bright grey	330147200	330377200 *
pebble grey	330148448	330378448 *
joint grey	330147800	330377800 *
silk grey	330147500	330377500 *
agate grey	330147900	330377900 *
manhattan	330142600	330372600 *
manhattan grey	330149100	330379100 *
window grey	330148500	330378500 *
stone grey	330147000	330377000 *
tele grey	330147006	330377006 *
grey	330147712	330377712 *
concrete grey	330147400	330377400 *
dust grey	330147300	330377300 *
aluminium	330147100	330377100 *
umbra grey	330148301	330378301 *
basalt grey	330147012	330377012 *
graphite grey	330147980	330377980 *
light anthracite	330148112	330378112 *
anthracite	330148100 *	330378100 *
black	330148000	330378000 *
purple red	330143400 *	330373400 *
oxide red	330143412	330373412 *
crocus	330144900	330374900 *
bermuda blue	330144100 *	330374100 *
pastel blue	330144200 *	330374200 *
light pigeon blue	330144267	330374267 *
pigeon blue	330144201 *	330374201 *
distant blue	330144206	330374206 *
dark blue	330144500 *	330374500 *
white green	330145300	330375300 *
light green	330145601	330375601 *
green	330145000 *	330375000 *
fir green	330145200 *	330375200 *
beige grey	330142514	330372514 *
beige	330147600	330377600 *
anemone	330142337	330372337 *
light bahama beige	330146104	330376104 *
bahamabeige	330146100 *	330376100 *
sand beige	330142400 *	330372400 *
fir	330147601	330377601 *
light curry	330142100 *	330372100 *
dark curry	330142101 *	330372101 *
yellow	330143503	330373503 *
saffron yellow	330143504	330373504 *
(psc./box.)/(boxes./Pal.)	20 Psc./60 box	20 Psc./30 boxes

	310 ml Cartridge	600 ml Foil bag
yellow orange	330143500	330373500 *
brown beige	330146500	330376500 *
rustic oak	330146405	330376405 *
light oak	330146401	330376401 *
oak	330146400	330376400 *
light brown	330146600 *	330376600 *
sepia brown	330146750 *	330376750 *
brown	330146000	330376000 *
champagne	330142501	330372501 *
copper brown	330146502	330376502 *
mahogany	330146800	330376800 *
dark brown	330146700	330376700 *
bronze	330146300 *	330376300 *
(psc./box.)/(boxes./Pal.)	20 Psc./60 box	20 Psc./30 boxes



# SILICONE SEALANTS

Barcode	310 ml Cartridge	600 ml Foil bag
0 742832 835152		
white	331141000	331371000 *
manhattan	331142600	331372670 *
anthracite	331148100	331378100 *
(pcs./box) / (boxes/pal.)	20 pcs./60 box	20 pcs./30 boxes

\* The marked item numbers are available in deviating minimum purchase quantities.

EGOSILICON 310 Fire protection B1 is a ready-to-use, tested, high-quality single-component sealant for fire-resistant and fire-retardant glazing and connection sealing. In addition to DIN 4102 (building materials B1 - hardly flammable) the fire protection silicone has also been tested according to DIN EN ISO 11925-2 and DIN EN 13823 and complies with the European provisions for building material class B-s1, d0 as per DIN EN 13501-1. During testing according to the "Guideline for fire safety regulations: building materials and components" of the Vereinigung Kantonalen Feuerversicherungen (VKF; Swiss association of fire insurances) EGOSILICON 310 Fire protection B1 achieved the fire index number BKZ 5.3. The silicone is resistant to weather influences, aging, UV and is free of 2 methylkethyl ketone oximes (MEKO) and methylisobutyl ketone oximes (MIBKO).

## EGOSILICON 310



FIRE PROTECTION B1


### Areas of application

Fire protection

### Characteristics



### Certificates



## EGOSILICONE 333

## GLAZED FACADE




## Areas of application

Glazed facades, facades

## Characteristics



## Certificates



	310 ml Cartridge	600 ml Foil bag
transparent	333140300	333370300 *
white	333141000	333371000 *
grey	333147000	333377000 *
black	333148000	333378000
(pcs./box) / (boxes/pal.)	20 pcs./60 box	20 pcs./30 boxes

\* The marked item numbers are available in deviating minimum purchase quantities. EGOSILICONE 333 is a neutral, ready-to-use, high-quality single-component silicone sealant that vulcanises through reaction with air humidity to form an elastic end product. The product is free of 2 methylkethyl ketone oximes (MEKO) and methylisobutyl ketone oximes (MIBKO).

- extreme adhesion power
- high mechanic strength
- stable
- tested as per ift regulation DI-01/1 and DI-02/1
- fast complete vulcanisation
- tack-free after the shortest time
- good processing quality

For modern glass architecture and weather-resistant sealing of silicone-bonded outdoor facades (two-sided structural glazing), for conservatories and roof glazing. For sealing of silicone-bonded insulating glass and VSG.



# SILICONE SEALANTS



EGOSILICONE 351



NATURAL STONE

Areas of application

Natural stone, marble, artificial stone granite, terrazzo, tiles

Characteristics



Certificates



DIN 18540; DIN EN ISO 11600 G 25 LM; DIN EN ISO 11600 F 25 LM; DIN EN 15651-1 F 25 LM EXT-INT-CC; DIN EN 15651-2 G 25 LM CC; DIN EN 15651-3 XS1; DIN 16938-1

IVD Merkblatt No. 1; 3-1; 3-2; 9; 10; 14; 19-1; 22; 23; 24; 25; 27; 28; 29; 31; 35



EGOSILICONE 351

NATURAL STONE, MATT

Areas of application

Natural stone, marble, artificial stone granite, terrazzo, tiles

Characteristics



Certificates



No. 3-1, 3-2, 14, 23, 25, 29, 35

DIN EN 15651-3 XS1; DIN 16938-1



	310 ml Cartridge	400 ml Foil bag	600 ml Foil bag
transparent	338140300	338380300 *	338370300 *
milky-transparent	338140305 *	338380305 *	338370305 *
white	338141000	338381000	338371000 *
carrara white	338141004 *	338381004 *	338371004 *
grey white	338141401 *	338381401 *	338371401
light grey	338149670	338389670 *	338379670 *
pearl grey	338148870	338388870	338378870 *
mist	338149390	338389390 *	338379390 *
manhattan	338142670	338382670	338372670 *
silk grey	338147500	338387500	338377500 *
pebble grey	338148400 *	338388400 *	338378400 *
mortar grey	338149100	338389100	338379100 *
sanitary grey	338149700	338389700	338379700
concrete grey	338147470	338387470	338377470 *
anthracite grey	338148171	338388171 *	338378171 *
anthracite	338148170	338388170	338378170 *
black	338148000	338388000	338378000
nirosta	338147105	338387105 *	338377105 *
jasmine	338142270	338382270	338372270 *
sandstone beige	338142501	338382501 *	338372501
anemone	338142370 *	338382370 *	338372370 *
beige	338142570 *	338382570 *	338372570 *
bahama beige	338146170	338386170	338376170
sunset	338143270 *	338383270 *	338373270 *
orange brown	338146680 *	338386680 *	338376680 *
oak	338146400 *	338386400 *	338376400 *
brown	338146070	338386070 *	338376070 *
(pcs./box) / (boxes/pal.)	20 pcs./60 box	20 pcs./60 box	20 pcs./30 boxes

\* The marked item numbers are available in deviating minimum purchase quantities. EGOSILICONE 351 is a ready-to-use, high-quality single-component silicone sealant that is free from plasticisers and vulcanises through reaction with air humidity to form an elastic end product. The product is suitable for natural stone in both indoor and outdoor areas. EGOSILICONE 351 MATT is an alternative to EGOSILICONE 351 if a matt sealant surface is desired.

The product is:


- creep-free
- fungicidal
- optimum skin-forming time
- compatible with natural stone
- water-proof

Sealing connection and movement joints in the sanitary sector, as well as for natural and artificial stone.

	310 ml Cartridge	400 ml Foil bag	600 ml Foil bag
white, matt	338141028 *	338381028 *	338371028 *
joint grey, matt	338149628 *	338389628 *	338379628 *
boston, matt	338147328	338387328 *	338377328 *
stone grey, matt	338147070	338387070 *	338377070 *
facade grey, matt	338149828 *	338389828 *	338379828 *
concrete grey, matt	338147270 *	338387270 *	338377270 *
anthracite, matt	338148128	338388128 *	338378128 *
anthracitegrey matt	338148172 *	338388172 *	338378172 *
black matt	338148028 *	338388028 *	338378028 *
(pcs./box) / (boxes/pal.)	20 pcs./60 box	20 pcs./60 box	20 pcs./30 boxes

\* The marked item numbers are available in deviating minimum purchase quantities.

# SILICONE SEALANTS

	310 ml Cartridge
ivory, matt	338141328 *
bianco	339140200 *
terra	339141100 *
(pcs./box) / (boxes/pal.)	20 pcs./60 box

\* The marked item numbers are available in deviating minimum purchase quantities. EGOSILICONE 352 is a ready-to-use, high-quality single-component silicone sealant that is free from plasticisers and vulcanises through reaction with air humidity to form an elastic end product. The product is compatible with natural stone and creep-free, resistant to UV, weathering and aging, fungicidal, water-proof, abrasion-resistant. The product is free of 2 methylkethyl ketone oximes (MEKO) and methylisobuthyl ketone oximes (MIBKO). Special silicone with textured surface finish for ideally matching joints or decorative contrast joints. Ideally suited for use in all natural and artificial stone applications, for cotto flooring and textured material surfaces.

## EGOSILICONE 352

NATURAL STONE, TEXTURED


### Areas of application

Natural stone, marble, artificial stone  
granite, terrazzo, tiles

### Characteristics



### Certificates

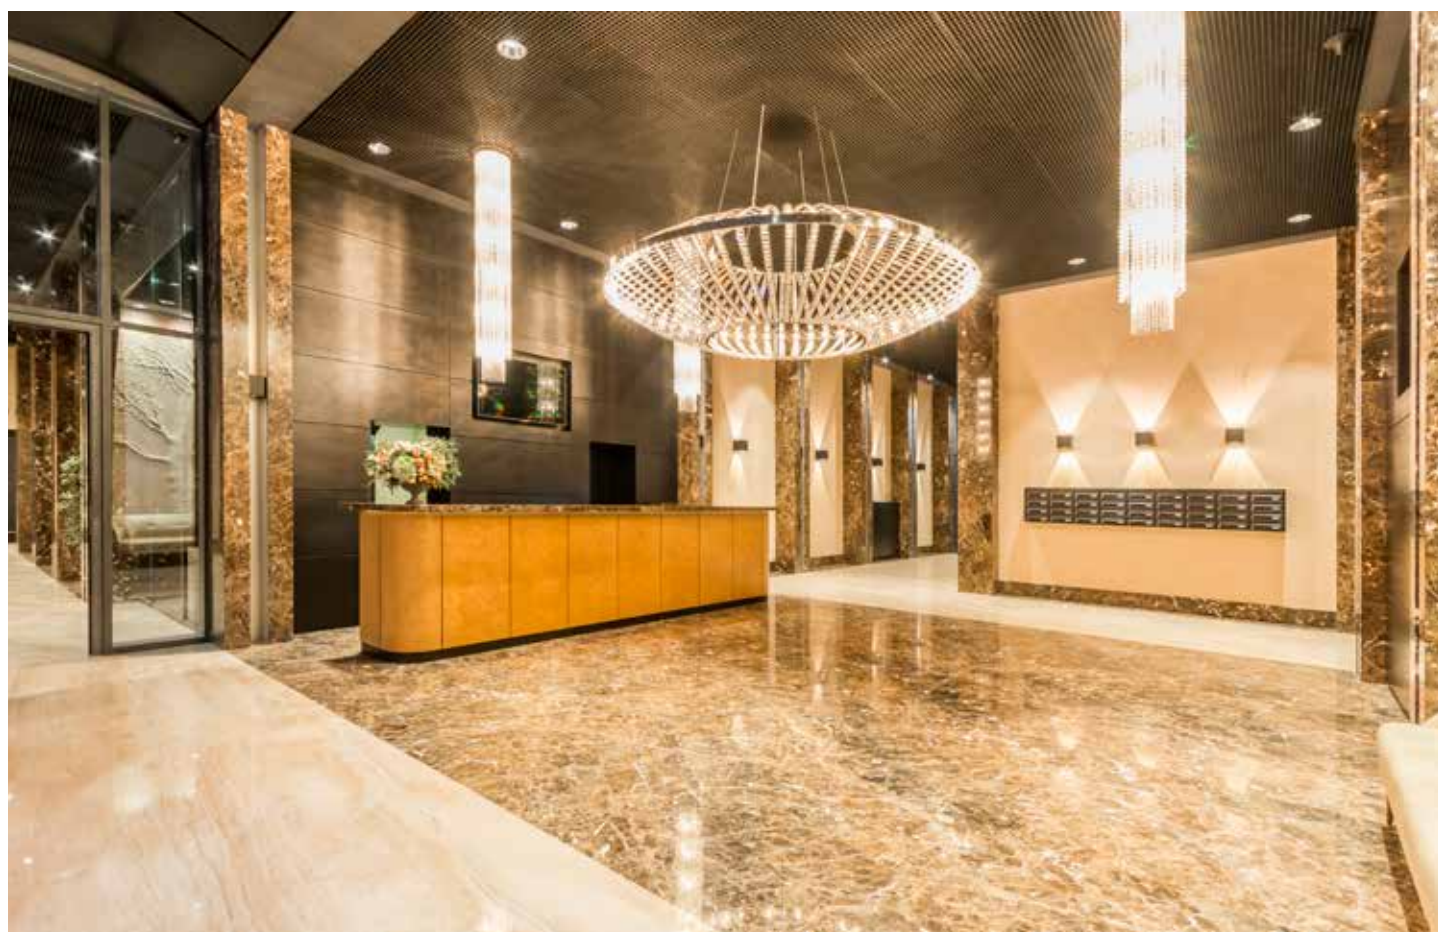

EGOSILICONE 360



THE BUILDING EXPERT

### Areas of application

Window connections, glass, concrete, plaster, masonry, metal, timber, plastics

### Characteristics



### Certificates



	310 ml Cartridge	600 ml Foil bag
transparent	336140300	336370300
milky-transparent	336140305	336370305
white	336141000	336371000
cream	336141500 *	336371500 *
grey white	336141400 *	336371400 *
bright grey	336147200 *	336377200 *
joint grey	336147800 *	336377800 *
silk grey	336147500 *	336377500 *
agate grey	336147900 *	336377900 *
manhattan	336142600 *	336372600 *
window grey	336148500 *	336378500 *
stone grey	336147000	336377000
concrete grey	336147400 *	336377400 *
dust grey	336147300 *	336377300 *
aluminium	336147100 *	336377100 *
black	336148000	336378000
purple red	336143400 *	336373400 *
bermuda blue	336144100 *	336374100 *
pastel blue	336144200 *	336374200 *
dark blue	336144500 *	336374500 *
green	336145000 *	336375000 *
fir green	336145200 *	336375200 *
beige grey	336147600 *	336377600 *
bahama beige	336146100 *	336376100 *
sand beige	336142400 *	336372400 *
light curry	336142100 *	336372100 *
dark curry	336142101 *	336372101 *
yellow orange	336143500 *	336373500 *
brown beige	336146500 *	336376500 *
light oak	336146401 *	336376401 *
oak	336146400	336376400
light brown	336146600 *	336376600 *
brown	336146000 *	336376000
mahogany	336146800 *	336376800 *
dark brown	336146700 *	336376700 *
bronze	336146300 *	336376300 *
(pcs./box) / (boxes/pal.)	20 pcs./60 box	20 pcs./30 boxes

\* The marked item numbers are available in deviating minimum purchase quantities. EGOSILICONE 360 is a ready-to-use, high-quality, tested single-component silicone sealant that vulcanises through reaction with air humidity to form an elastic end product and is characterised by its high abrasion-resistance. The product is coloured and fungicidal. EGOSILICONE 360 is free of 2 methylkethyl ketone oximes (MEKO) and methylisobutyl ketone oximes (MIBKO) and is characterised by improved smell.

Abrasion-resistant window glazing, especially for windows with glazing bars, connection and expansion joints, concrete, plaster, masonry, metals, tension-free plastics and painted/varnished timber.

# SILICONE SEALANTS

	310 ml Cartridge	400 ml Foil bag	600 ml Foil bag
			
transparent	337140300	337380300	337370300 *
milky-transparent	337140305	337380305	337370305 *
white	337141000	337381000 *	337371000 *
carrera white	337141004 *	337381004 *	337371004 *
grey white	337141401 *	337381401 *	337371401
light grey	337149670	337389670 *	337379670 *
pearl grey	337148870 *	337388870 *	337378870 *
mist	337149390 *	337389390 *	337379390 *
manhattan	337142670	337382670	337372670 *
silk grey	337147500	337387500	337377500 *
pebble grey	337148400 *	337388400 *	337378400 *
mortar grey	337149100	337389100 *	337379100 *
sanitary grey	337149700	337389700	337379700 *
concrete grey	337147470	337387470	337377470 *
anthracite grey	337148171	337388171 *	337378171 *
anthracite	337148170	337388170	337378170 *
black	337148000	337388000	337378000
nirosta	337147105	337387105 *	337377105 *
jasmine	337142270	337382270	337372270 *
sandstone beige	337142501*	337382501 *	337372501 *
anemone	337142370 *	337382370 *	337372370 *
beige	337142570 *	337382570 *	337372570 *
bahamabeige	337146170 *	337386170 *	337376170 *
sunset	337143270 *	337383270 *	337373270 *
orange brown	337146680 *	337386680 *	337376680 *
oak	337146400 *	337386400 *	337376400 *
brown	337146070	337386070 *	337376070 *
(Pcs./box)/(boxes/pal.)	20 Pcs./60 Box	20 Pcs./40 Box	20 Pcs./40 Box

EGOSILICON 365 is suitable for universal use on all common substrates in natural stone, sanitary, structural engineering, glass & metal construction, kitchen fitting and timber construction, permanently wet area and pool areas. For connection and expansion joints which require high movement absorption.

	310 ml Cartridge	400 ml Foil bag	600 ml Foil bag
white, matt	337141028 *	337381028 *	337371028 *
joint grey, matt	337149628 *	337389628 *	337379628 *
boston, matt	337147328 *	337387328 *	337377328 *
stone grey, matt	337147070	337387070 *	337377070 *
facade grey, matt	337149828 *	337389828 *	337379828 *
concrete grey, matt	337147270 *	337387270 *	337377270 *
anthracite, matt	337148128	337388128 *	337378128 *
anthracite grey, matt	337148172 *	337388172 *	337378172 *
black, matt	337148028 *	337388028 *	337378028 *
(Pcs./box)/(boxes/pal.)	20 Pcs./60 Box	20 Pcs./40 Box	20 Pcs./40 Box

EGOSILICON 365 MATT is suitable as an alternative and can likewise be used on all common substrates in natural stone, sanitary construction, structural engineering, glass & metal construction, kitchen fitting and timber construction. We do not recommend EGOSILICON 365 MATT for pool areas.

## EGOSILICONE 365



ALL IN ONE


### Areas of application

Natural stone, sanitary, swimming pool, building construction

### Characteristics



### Certificates



## EGOSILICONE 365 MATT



MATT


### Areas of application

Natural stone, sanitary

### Characteristics



### Certificates



## EGOSILICONE 460

BAUFIX

## Areas of application

Glass, concrete, masonry, artificial stone, metal, clean room, marine

## Characteristics



## Certificates




	310 ml Cartridge	600 ml Foil bag
		
transparent	366140300	366370300
milky-transparent	366140305 *	366370305 *
white	366141000	366371000
cream	366141500 *	366371500 *
grey white	366141400 *	366371400 *
bright grey	366147200 *	366377200 *
joint grey	366147800 *	366377800 *
silk grey	366147500 *	366377500 *
agate grey	366147900 *	366377900 *
manhattan	366142600	366372600 *
window grey	366148500 *	366378500 *
stone grey	366147000	366377000 *
concrete grey	366147400 *	366377400 *
dust grey	366147300 *	366377300 *
aluminium	366147100 *	366377100 *
black	366148000	366378000
purple red	366143400 *	366373400 *
bermuda blue	366144100 *	366374100 *
pastel blue	366144200 *	366374200 *
dark blue	366144500 *	366374500 *
green	366145000 *	366375000 *
fir green	366145200 *	366375200 *
beige grey	366147600 *	366377600 *
bahama beige	366146100 *	366376100 *
sand beige	366142400 *	366372400 *
light curry	366142100 *	366372100 *
dark curry	366142101 *	366372101 *
yellow orange	366143500 *	366373500 *
brown beige	366146500 *	366376500 *
light oak	366146401 *	366376401 *
oak	366146400	366376400 *
light brown	366146600 *	366376600 *
brown	366146000	366376000 *
mahogany	366146800 *	366376800 *
dark brown	366146700	366376700 *
bronze	366146300	366376300 *
anthracite	366148170 *	366378170 *
(pcs./box) / (boxes/pal.)	20 pcs./60 box	20 pcs./30 boxes

\* The marked item numbers are available in deviating minimum purchase quantities. EGOSILICONE 460 is an odorless, ready-to-use, high-quality and tested single-component silicone sealant that vulcanises through reaction with air humidity to form an elastic end product and is characterised by its high abrasion-resistance. Glass sealing, connection and expansion joints, concrete, plaster, masonry, artificial stone, metals, tension-free plastics and painted/varnished timber. Especially for windows with glazing bars.





# SILICONE SEALANTS

 0 742832 835107	310 ml Cartridge
white	361141000
(pcs./box) / (boxes/pal.)	20 pcs./60 box

\* The marked item numbers are available in deviating minimum purchase quantities.  
**THE MIRROR & PAINTED GLASS ADHESIVE** is a ready-to-use, high-quality, odorless, single-component silicone sealant that is free from plasticisers and vulcanises through reaction with air humidity to form an elastic end product.

For bonding of mirrors and painted glass on various substrates. Compatibility with the mirror coats of renowned manufacturers has been tested. However, due to factors that cannot be influences, we recommend performing your own tests and trials. Excellent adhesion on enamel, glass, glazed tiles, varnished timber, glazed clinker and porcelain.

## MIRROR & PAINTED GLASS ADHESIVE



### Areas of application

Mirrors

### Characteristics



### Certificates



Type	Curing system	Shore A hardness DIN 53505	Module/ tensile stress 100 % DIN EN ISO 8339	acc. total deformation	Class after DIN EN 15651 or DIN EN SIO 11600
EGOSILICONE 100 ORIGINAL	acidic (acetoxo)	approx. 20	approx. 0.4 N/mm <sup>2</sup>	25.0%	F 25 LM EXT-INT-CC G 25 LM CC
EGOSILICONE 110 AQUARIUM	acidic (acetoxo)	approx. 25	approx. 0.5 N/mm <sup>2</sup>	25.0%	G 25 HM
EGOSILICONE 111 FOOD & DRINKING WATER	acidic (acetoxo)	approx. 25	approx. 0.6 N/mm <sup>2</sup>	20.0%	F 20 HM EXT-INT-CC G 20 HM CC
EGOSILICONE 120 HIGH TEMPERATURE	acidic (acetoxo)	approx. 32	approx. 0.7 N/mm <sup>2</sup>	20.0%	F 20 HM EXT-INT-CC G 20 HM CC
EGOSILICONE 151 SANITARY PROFESSIONAL	acidic (acetoxo)	approx. 20	approx. 0.4 N/mm <sup>2</sup>	25.0%	F 25 LM EXT-INT-CC G 25 LM CC XS 1
EGOSILICONE 191 SANITARY SEAL	acidic (acetoxo)	approx. 30	approx. 0.6 N/mm <sup>2</sup>	25.0%	XS 1
EGOSILICONE 300 CONSTRUCTION SEALANT	neutral (oxim)	approx. 25	approx. 0.4 N/mm <sup>2</sup>	25.0%	F 25 LM EXT-INT-CC G 25 LM CC
EGOSILICONE 310 FIRE PROTECTION B1	neutral (oxim)	approx. 25	approx. 0.4 N/mm <sup>2</sup>	25.0%	F 25 LM EXT-INT-CC G 25 LM CC
EGOSILICON 333 GLASFASSADE	neutral (oxim)	approx. 33	approx. 0.6 N/mm <sup>2</sup>	20,0 %	F 20 HM EXT-INT-CC G 20 HM CC
EGOSILICONE 351 NATURAL STONE	neutral (oxim)	approx. 24	approx. 0.5 N/mm <sup>2</sup>	20.0%	XS 1
EGOSILICONE 351 NATURAL STONE, MATT	neutral (oxim)	approx. 31	approx. 0.5 N/mm <sup>2</sup>	20.0%	XS 1
EGOSILICONE 352 NATURAL STONE, TEXTURED	neutral (oxim)	approx. 24	approx. 0.4 N/mm <sup>2</sup>	25.0%	F 25 LM EXT-INT-CC G 25 LM CC XS 1
EGOSILICONE 360 THE BUILDING EXPERT	neutral (oxim)	approx. 20	approx. 0.4 N/mm <sup>2</sup>	25.0%	F 25 LM EXT-INT-CC G 25 LM CC
EGOSILICONE 365 ALL IN ONE	neutral (oxim)	approx. 24	approx. 0.4 N/mm <sup>2</sup>	25.0%	F 25 LM EXT-INT-CC G 25 LM CC XS 1
EGOSILICONE 365 MATT	neutral (oxim)	approx. 31	approx. 0.4 N/mm <sup>2</sup>	25.0%	F 25 LM EXT-INT-CC G 25 LM CC XS 1
EGOSILICONE 460 BAUFIX	neutral (alkoxy)	approx. 24	approx. 0.4 N/mm <sup>2</sup>	25.0%	F 25 LM EXT-INT-CC G 25 LM CC
MIRROR ADHESIVE PAINTED GLASS ADHESIVE	neutral (alkoxy)	approx. 25	approx. 0.5 N/mm <sup>2</sup>	20.0%	

# SILICONE SEALANTS

Product	Tests	IVD quality label	CE marking	EMICODE EC1/EC1Plus	AgBB scheme	French VOC class A+	French KMR regulation	LEED®-credit EQ c4.1	Food compatibility certificate	B-s1,d0 hardly flammable as per EN 13501	B1 hardly flammable as per DIN 4102	Fire index number BKZ 5.3 (Vkf)	Fire protection "rails"	Clean room and RLT systems	Formation of streaks / abrasion	ISO edge bonding	VSG edge bonding	DGNB declaration	Baubook Austria
EGOSILICONE 100		✔	✔	✔	✔	✔	✔	✔											✔
EGOSILICONE 110		✔	✔	✔	✔	✔	✔	✔											✔
EGOSILICONE 111		✔	✔	✔	✔	✔	✔	✔	🔴										✔
EGOSILICONE 120		✔	✔			✔	✔												✔
EGOSILICONE 151		✔	✔	✔	✔	✔	✔	✔									✔		✔
EGOSILICONE 191		✔	✔			✔	✔	✔											✔
EGOSILICONE 300		✔	✔	(✔)	✔	✔	✔	✔					🔴	①				✔	✔
EGOSILICONE 310		✔	✔		✔	✔	✔	✔		🔴	🔴	🔴							✔
EGOSILICONE 333		✔	✔	✔	✔	✔	✔	✔							🔴	🔴		✔	✔
EGOSILICONE 351		✔	✔	✔	✔	✔	✔	✔					🔴				✔		✔
EGOSILICONE 352		✔	✔			✔	✔												✔
EGOSILICONE 360		✔	✔	(✔)	✔	✔	✔	✔					🔴	🔴			✔		✔
EGOSILICONE 365		✔	✔	✔	✔	✔	✔	✔											✔
EGOSILICONE 460		✔	✔	✔		✔	✔	✔					🔴					✔	
MIRROR & PAINTED GLASS ADHESIVE		✔				✔	✔	✔											✔

✔ is available 🔴 Certificate ✔ VOC ✔ Declaration ① transparent abrasion-resistant

( ) Only valid for EGOSILICION 300 transparent and EGOSILICION 360 transparent

## EGOCON PRIMER FDF

EGOCON FDF

## Areas of application

Concrete, facade, tiles, natural stone

## Characteristics

Ablüftezeit  
30 min.

	100 ml Bottle	500 ml Can	5000 ml Metal canister
Order number	660640300	660260300	660720300

EGOCON PRIMER FDF is a ready-to-use primer (non-discolouring) for improvement of contact adhesion of EGOSIL Adhesive, EGOSILICONE and MS/SMP polymers, preferably on marble, artificial and natural stone.



# ACCESSORIES

	500 ml Can	5000 ml Metal canister
Order number	665260000	665720000

EGO CONTACT CLEANER is especially suitable for improving contact adhesion on predominantly smooth substrates, on metals and plastics, in particular TGIC-free powder coatings. Instructions for use: Apply EGO CONTACT CLEANER, wipe off with a clean cloth. Then leave the EGO CONTACT CLEANER to flash off for approx. 10 minutes. Always carry out your own tests.

## EGO CONTACT CLEANER

PRIMER & CLEANER

### Areas of application

Metal, plastics

### Characteristics

**Ablüftezeit**  
**10 min.**



	100 ml Bottle	500 ml Can	5000 ml Metal canister
Order number	662640000	662260000	662720000

EGO PRIMER FML is a ready-to-use primer for improvement of contact adhesion of EGO-SILICONE on any kinds of metal, plastics, such as acrylic glass, polycarbonate, hard PVC, polyester and coats such as varnishes and facade paints, etc.

## EGO PRIMER FML

EGOCON 790

### Areas of application

Acrylic glass, polycarbonate, polyester, hard PVC, varnishes, facade paint

### Characteristics

**Ablüftezeit**  
**30 min.**



## WOODEN SMOOTHING SPATULAS



Item	Format/size	Order number
Wooden smoothing spatula	6 mm	570017000
Wooden smoothing spatula	8 mm	570018000
Wooden smoothing spatula	10 mm	570019000
Wooden smoothing spatula	15 mm	570020000
Wooden smoothing spatula	20 mm	570021000
Wooden smoothing spatula	25 mm	570022000
Wooden smoothing spatula	30 mm	570023000
Wooden smoothing spatula	35 mm	570024000
Wooden smoothing spatula	40 mm	570025000

## SMOOTHINGRUBBER, SMOOTHING MASTER KIT



Item	Size	Order number
Smoothing master kit	11-17 mm	590002020
Smoothing rubber "Glättfix"	oval	570014000
Smoothing rubber "Glättfix Expert"	oval	570032000
Smoothing rubber "square" PALÜ	square	590015000

## ACCESSORIES

System	Product	Order number	Packaging unit
310 ml Cartridge	FIX 1C NOZZLE STANDARD	022000117	1 pcs
310 ml Cartridge	FIX 1C NOZZLE STANDARD	022000114	10 pcs
310 ml Cartridge	FIX 1C NOZZLE STANDARD	022000112	20 pcs
310 ml Cartridge	FIX 1C LONG NOZZLE	022000111	1 pcs
310 ml Cartridge	FIX 1C CLIP NOZZLE V-SEAM	022000118	1 pcs
310 ml Cartridge	FIX 1C CLIP NOZZLE WHITE	022000123	1 pcs
310 ml Cartridge	FIX 1C CLIP NOZZLE WHITE/RED (LID)	022000192	1 pcs
310 ml Cartridge	FIX 1C NOZZLE WHITE/RED TURNABLE	570000930	1 pcs
310 ml Cartridge	FIX 1C NOZZLE 45° JOINT ANGLE PIECE	570003605	1 pcs
400 & 600 ml Tubular film	FIX 1C FUNNEL NOZZLE WHITE	022000115	1 pcs
400 & 600 ml Tubular film	FIX 1C FUNNEL NOZZLE YELLOW 45° ANGLE	590016000	1 pcs

## ROTATING JOINT NOZZLE



System	Product	Order number
EGOPOXID 10 ml	FIX 2C MIXING PIPE	570000919
EGOPOXID 50 ml	FIX 2C MIXING PIPE	570000901
EGOPOXID 50 ml	FIX 2C MIXING PIPE (FOR CHANGEABLE TIPS)	570000902
EGOPOXID 50 ml	FIX 2C CHANGEABLE TIPS	570000903
EGOPOXID 200 ml	FIX 2C MIXING PIPE	570000906

## MIXING TUBES



## EGOFIX AIRJET

## Characteristics

**6 - 10 bar**  
Druck-luft



EGOFIX AIRJET KB 600

**1k** **400 ml** **600 ml**  
System Gebinde Gebinde  
**310 ml** **50 mm**  
Gebinde Gebinde



EGOFIX AIRJET KB 400

**310 ml** **400 ml** **1k**  
Gebinde Gebinde System



EGOFIX 2K-AIRJET DLP 900

**2k** **1:1** **4-8 bar**  
System Verhältnis  
**3,3 kN** **190 ml** **310 ml**  
Gebinde Gebinde

Sealing devices for sealants	Standard application	Order number
EGOFIX AIRJET KB 600	600 ml	590090600 *
EGOFIX AIRJET KB 400	400 ml	590090400 *
EGOFIX 2K-AIRJET DLP 900	900 ml	590038000

\* The marked item numbers are available in deviating minimum purchase quantities. The EGOFIX AIRJET and EGOFIX 2K-AIRJET is excellently suitable for processing of EGO cartridges and foil bags for professional and industrial sealing. The variable working pressure between 6 and 10 bar and minimum air consumption ensure efficient operation. The optimally positioned gravity point and the anodised aluminium tube ensure practical and long-term use. The pressure relief valve has a quick reaction time.

## EGOFIX FX

## Characteristics

**17:1** **310 ml** **400 ml** **600 ml**  
Übersetzung Gebinde Gebinde Gebinde

**1k** **manuell**  
System Typ



Sealing devices for sealants	Standard application	Order number
EGOFIX FX 90	310 ml	590036790
EGOFIX FX 40	400 ml	590036740 *
EGOFIX FX 60	600 ml	590036760

\* The marked item numbers are available in deviating minimum purchase quantities. The EGOFIX FX series is excellently suitable for processing of EGO cartridges and foil bags. The practical rubber-lined handle and the perfectly adjusted trigger ensure ergonomic and comfortable working. The powerful pusher simultaneously ensures increased compressive strength of the feed mechanism. The release hook can be easily grabbed and set in position. The EGOFIX FX series complies with all requirements for a stable and high-quality sealing device.



Sealing devices for sealants	Standard application	Order number
EGOFIX EXCEPT 310	310 ml	590036831
EGOFIX EXCEPT 400	400 ml	590036840 *
EGOFIX EXCEPT 600	600 ml	590036860

\* The marked item numbers are available in deviating minimum purchase quantities. The EGOFIX EXCEPT series is excellently suitable for processing of EGO cartridges and foil bags. The practical rubber-lined handle and the perfectly adjusted trigger ensure ergonomic and comfortable working. It ensures professional jointing thanks to the tailing stop function that can be activated. The sintered pusher block ensures high compressive strength of the feed mechanism. The corrosion-protection special alloy ensures long service life. The release hook can be easily grabbed and set in position. The integrated dosing nozzle blade is a practical feature that helps in cutting the cartridges open during daily work. The improved transmission ratio ensures good pressing of material at low pressure. The EGOFIX EXCEPT series complies with all requirements for a stable and high-quality sealing device.

Sealing devices for sealants		Order number
EGOFIX POWERJET	600 ml	590083860 *
Charger	-	590083866 *
Spare rechargeable battery	-	590083865 *

\* The marked item numbers are available in deviating minimum purchase quantities. The EGOFIX POWERJET is excellently suitable for processing of foil bags for professional sealing. The practical rubber-lined handle and the infinitely variable feed trigger ensure comfortable working. The automatic return function ensures professional jointing in transition areas of joints. The integrated LED light ensures good lighting of poorly lit working areas. The optionally available spare rechargeable batteries and chargers ensure professional working and parallel charging of other batteries. Thanks to its outstanding handling features, the EGOFIX POWERJET complies with the highest requirements for battery-operated sealing devices.

## EGOFIX EXCEPT

### Characteristics



## EGOFIX POWERJET

### Characteristics



## EGOFÜLL PE

## BACKFILLING

## Areas of application

Backfilling of joints

## Characteristics

Weich-  
macher  
frei

PE

DIN

nach  
DIN 18540

## EGOFÜLL PUR

## BACKFILLING

## Areas of application

Backfilling of joints

## Characteristics

Weich-  
macher  
frei

PUR



	Order number	∅	Length	Delivery form	(m/box)/(boxes/pal.)
grey	603006073	6 mm	100 m	Wrapped bundle	500 m/6 box
grey	603008073	8 mm	100 m	Wrapped bundle	500 m/6 box
grey	603010073	10 mm	100 m	Wrapped bundle	500 m/6 box
grey	603013073	13 mm	100 m	Wrapped bundle	500 m/6 box
grey	603015073	15 mm	100 m	Wrapped bundle	500 m/6 box
grey	603020073	20 mm	50 m	Wrapped bundle	250 m/6 box
grey	603025073	25 mm	50 m	Wrapped bundle	250 m/6 box
grey	603030073	30 mm	25 m	Wrapped bundle	125 m/6 box
grey	603040072 *	40 mm	2 m	Rod	270 m/6 box
grey	603050072 *	50 mm	2 m	Rod	180 m/6 box

\* The marked item numbers are available in deviating minimum purchase quantities.

EGOFILL PE is a closed-cell, foamed, weather-resistant and plasticiser-free PE roand profile. It can be pressed in and is not water-absorbent. Excellent resistance to oils, grease, diluted lyes, salt water and washing detergents, as well as aromatic and chlorinated hydrocarbons. For backfilling of connection and construction joints, e.g. for jointing according to DIN 18540 and the like.

## EGOFILL PE HOLLOW

	Order number	∅	Length	Delivery form	(m/box)/(boxes/pal.)
grey	603015079 *	15 mm	550 m	Wrapped bundle	550 m/12 box
grey	603020079 *	20 mm	350 m	Wrapped bundle	350 m/12 box
grey	603025079 *	25 mm	200 m	Wrapped bundle	200 m/12 box
grey	603030079 *	30 mm	160 m	Wrapped bundle	160 m/12 box

\* The marked item numbers are available in deviating minimum purchase quantities.

	Order number	∅	Length	Delivery form	(m/box)/(boxes/pal.)
grey	602010004	10 mm	1000 mm	loose in the cardboard box	1500 m/6 box
yellow	602010005				
grey	602015004	15 mm	1000 mm	loose in the cardboard box	1000 m/6 box
yellow	602015005				
grey	602020004	20 mm	1000 mm	loose in the cardboard box	500 m/6 box
yellow	602020005				
grey	602025004 *	25 mm	1000 mm	loose in the cardboard box	350 m/6 box
yellow	602025005				
grey	602030004	30 mm	1000 mm	loose in the cardboard box	250 m/6 box
yellow	602030005				
grey	602040004 *	40 mm	1000 mm	loose in the cardboard box	150 m/6 box
yellow	602040005				
grey	602050004 *	50 mm	1000 mm	loose in the cardboard box	100 m/6 box
yellow	602050005 *				

\* The marked item numbers are available in deviating minimum purchase quantities.

EGOFILL PUR is an easily compressible, open-cell and plasticiser-free roand cord made of polyurethane foam. For backfilling of connection and construction joints, for indoor applications. Not permitted for backfilling of joint seals in building construction joints according to DIN 18540.

# NOTES




0 5 10 15 20 25 30 35 40 45 50 55 60 65 70 75 80 85 90 95 100 105 110 115 120 125 130 135 140 145 150 155 160 165 170 175 180 185 190 195 200 205 210 215 220 225 230 235 240 245 250 255

EGO DICHTSTOFFWERKE GMBH & CO. BETRIEBS KG  
 Kaltenbrunn 27 · D-82467 Garmisch-Partenkirchen  
 Phone +49 (0)8821 95 69 0 · Mail info@ego.de



Quality-  
Products

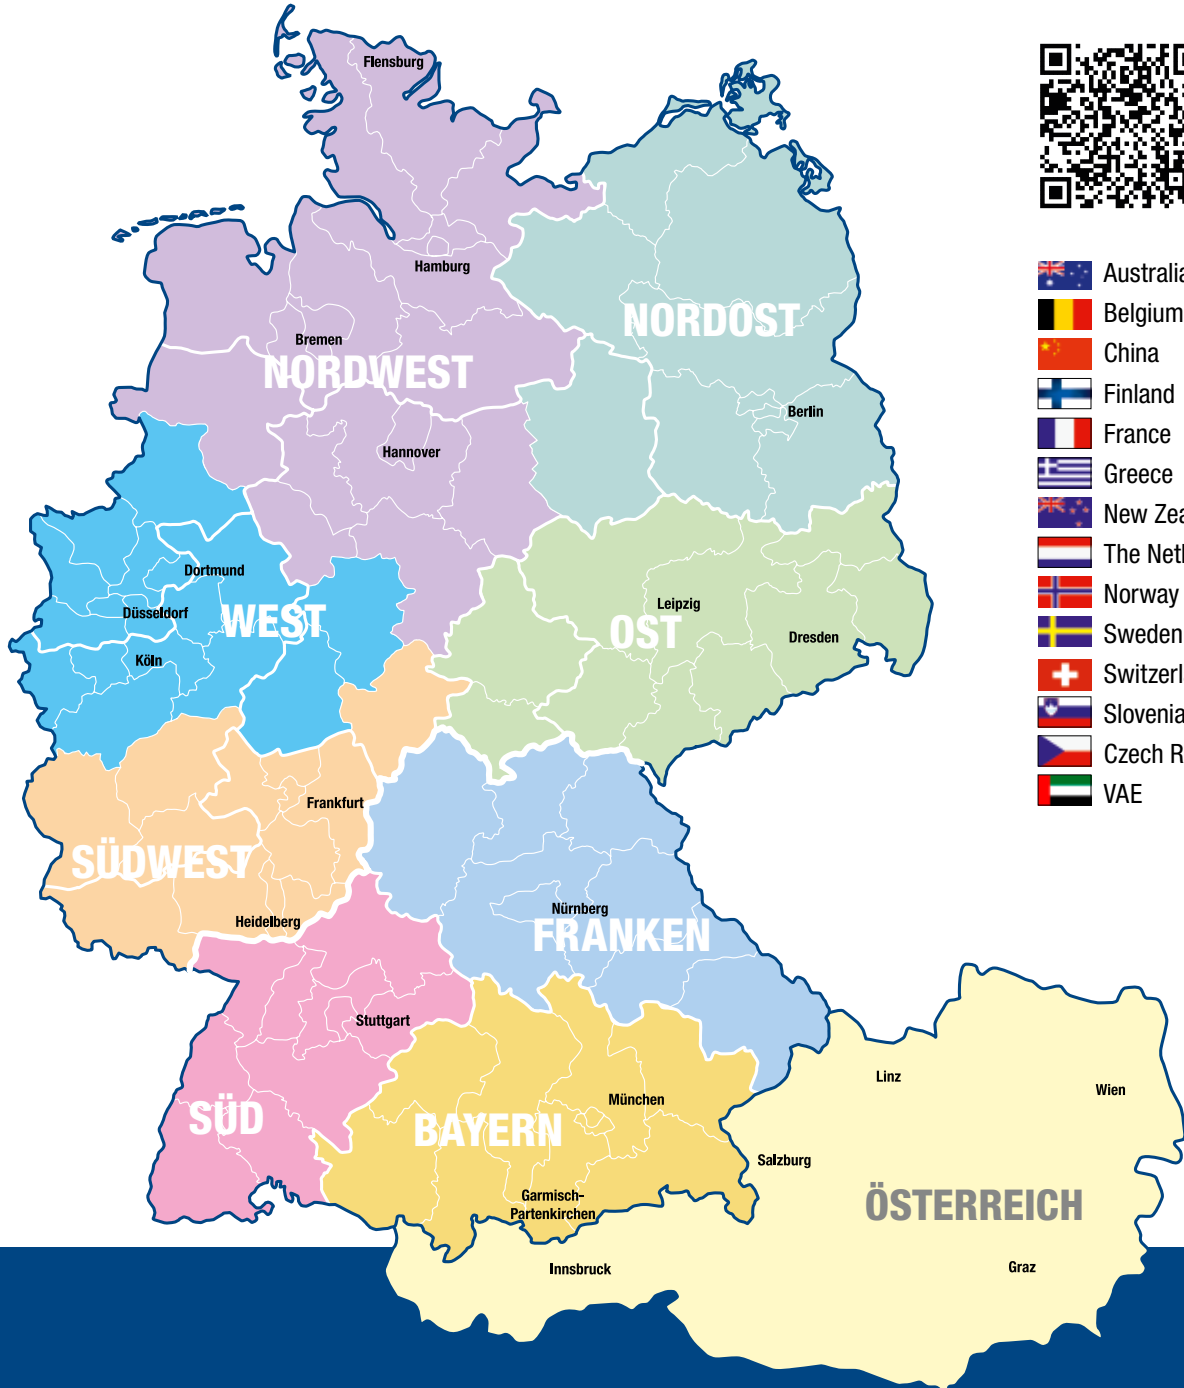

-  Australia
-  Belgium
-  China
-  Finland
-  France
-  Greece
-  New Zealand
-  The Netherlands
-  Norway
-  Sweden
-  Switzerland
-  Slovenia
-  Czech Republic
-  VAE


Subject to misprints, technical and sales programme alterations.

Deviations from the original colours are caused by the printing technology used. Edition 01/2023

[www.ego.de](http://www.ego.de)



Mitglied im Bundesinnungsverband  
des Glaserhandwerks  
 Mitglied im Industrieverband  
Dichtstoffe e.V.  
 Mitglied des Instituts für  
Fenstertechnik e.V. Rosenheim

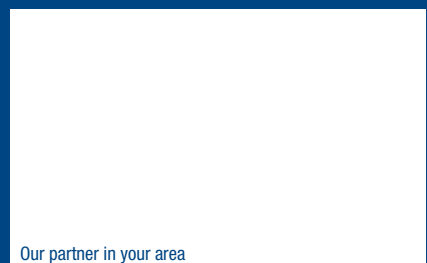

Our partner in your area