

Product Verification

Sustainability

Self declared according to DGNB NBV 2015

Product Systems

EGOSILICON 351

EGO Dichtstoffwerke GmbH & Co. Betriebs KG

EGOSILICONE 351 is a ready-to-use, high-quality single-component silicone sealant that is free from plasticisers and vulcanises through reaction with air humidity to form an elastic end product. The product is suitable for natural stone in both indoor and outdoor areas. The product is:

- creep-free
- compatible with natural stone
- colored fungicidal adjusted
- shiny abrasion resistant
- water-proof
- optimum skin-forming time

Sealing connection and movement joints in the sanitary sector, as well as for natural and artificial stone. EGOSILICONE 351 fulfills the requirements according to EMICODE EC 1.

https://www.ego.de/produkt/egosilicon351







Product Assessment

Environmental Quality (ENV)

| Criteria | Product Verification |
|---|----------------------|
| ENV 1.1/2.1 Life cycle assessment (Updated on: 26.01.2017) | EPD available: Yes |
| ENV 1.2 Local environmental impact (Updated on: 08.06.2017) | Quality level 4 of 4 |

Legend: yes = Product contributes toward satisfying the credit, N/A = Product not relevant in the credit, no = Credit requirements are not proven

Summary

The product contributes to the certification:

- The product has an Environmental Product Declaration (EPD) which can be used to calculate the building life cycle assessment: EPD available: Yes
- Achieved quality level in DGNB Criteria ENV 1.2 Local environmental impact for the entire product: Quality level 4 of 4



• Ecolabels & Product-Assessments



Product Properties

Ingredients:

| Percentage of the product's composition, that is known to the chemical ingredient level | 100 wt% |
|---|---------|
| Free (< 0,1 %) of chlorinated paraffins (= CP inkl. SCCP, MCCP, LCCP): | Yes |
| Free (< 0,1 %) of biocidal: | No |
| Free (< 0,1 %) of polybrominated diphenyl ethers (= PBDE): | Yes |
| Free (< 0,1 %) of hydrocarbon (KWS) plasticizer: | Yes |
| Recycled content post-consumer: | N/A |
| Recycled content pre-consumer: | N/A |
| VOC content according 2004/42/EG: | o g/l |
| VOC content according 2004/42/EG: | N/A |
| Free (< 0,1 %) of polybrominated biphenyls (= PBB): | Yes |
| Free (< 0,1 %) of hexabromocyclododecane (= HBCD): | Yes |
| Free (< 0,1 %) of tris (2-carboxyethyl) phosphine (= TCEP): | Yes |
| Free (< 0,1 %) of lead: | Yes |
| Free (< 0,1 %) of cadmium: | Yes |
| Free (< 0,1 %) of chromium-VI compounds: | Yes |
| Free of solvent according to VdL-RLo1: | Yes |
| Free (< 0,1 %) of aromatic compounds: | Yes |
| Free (< 0,1 %) from halogenated propellants: | Yes |
| Free (< 0,1 %) of halogenated flame retardants: | Yes |



| Content of VOC: | 0% |
|---|---------|
| Content of solvents: | 0 % |
| Free (< 0,1 %) of halogens: | Yes |
| To what level of detail is the product composition known? | 100 ppm |
| Rapidly renewable content | N/A |
| Non renewable virgin raw material content | N/A |
| Free (< 0,1 %) of tin: | Yes |
| Free of plasticizer according to VdL-RLo1: | Yes |

Manufacturer:

| Environmental Management System according ISO 14001: | Yes |
|--|--------------------------|
| Are reverse logistics in place for the product? | No |
| Final manufacturing location of the product: longitude | 11.177829263566535 ° DDD |
| Final manufacturing location of the product: latitude | 47.49054076514584 ° DDD |

Emissions:

| Formaldehyde emissions after 28 days according DIN EN 717-1: | 0.002 mg/m ³ |
|---|-------------------------|
| R-Value according to AgBB: | 0,02 |
| TVOC after 3 days according ISO 16000-3 / AgBB: | 0,89 mg/m³ |
| TVOC after 28 days according ISO 16000-3 / AgBB: | 0,049 mg/m³ |
| Carcinogens 1A and 1B after 3 days according ISO-16000 / AgBB: | 0,001 mg/m³ |
| Carcinogens 1A and 1B after 28 days according ISO-16000 / AgBB: | 0.001 mg/m ³ |
| SVOC after 3 days according ISO 16000-3 / AgBB: | N/A |
| SVOC after 28 days according ISO 16000-3 / AgBB: | N/A |
| | |

Life Cycle Assessment:

| i unctional use penou IN/A | Functional | l use period | | N/A |
|----------------------------|------------|--------------|--|-----|
|----------------------------|------------|--------------|--|-----|

Circularity:




System description

The DGNB certification system was founded by the "German Sustainable Building Council" and first appeared on the market in 2008. The DGNB system evaluates buildings holistically on the basis of individual criteria within the categories Ecological Quality, Economic Quality, Sociocultural and Functional Quality, Technical Quality, Process Quality and Location Quality. Different profiles allow the certification of new buildings and existing buildings, as well as of quarters in Germany and Internationally. Buildings can achieve a certification in Bronze, Silver, Gold and Platinum. Up to now, more than 3,500 projects have been awarded by the DGNB (as of June 2018).

Source: www.dgnb.de

System categories

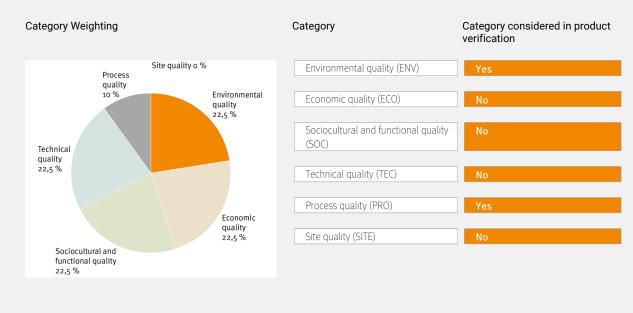

Source: DGNB NBV 15



Detailed Verification

Self declared according to DGNB NBV 2015

Environmental Quality (ENV)

ENV 1.1/2.1 Life cycle assessment (Updated on: 26.01.2017)

The product has an Environmental Product Declaration (EPD) which can be used to calculate the building life cycle assessment:

| EGOSILICON 351 | EPD available: Yes |
|--|--------------------------------------|
| An environmental product declaration exists for the product: | |
| EGOSILICON 351 | Yes |
| | |
| EPD Owner of the Declaration: | |
| EGOSILICON 351 | DBC, EFCC, FEICA, IVK |
| | |
| EPD Publisher: | |
| EGOSILICON 351 | Institut Bauen und Umwelt e.V. (IBU) |
| | |
| EPD Programme holder: | |
| EGOSILICON 351 | Institut Bauen und Umwelt e.V. (IBU) |
| | |
| EPD Declaration number: | |
| EGOSILICON 351 | EPD-DBC-20220180-IBF1-EN |
| | |
| EPD Issue date: | |
| EGOSILICON 351 | 31.08.2022 |
| | |
| EPD valid to: | |
| EGOSILICON 351 | 30.08.2027 |
| | |

ENV 1.2 Local environmental impact (Updated on: 08.06.2017)

Achieved quality level in DGNB Criteria ENV 1.2 Local environmental impact for the entire product:

| EGOSILICON 351 | Quality level 4 of 4 |
|----------------|----------------------|
| | |

Achieved quality level in DGNB Criterion ENV 1.2 Local environmental impact:

| EGOSILICON 351 Quality lev | rel 4 |
|----------------------------|-------|
|----------------------------|-------|



Row 12: Adhesions of mechanically stressed joints over small areas; the areas glass construction, façade and fire protection are not considered here. Sealing compounds, sealing substances, adhesives for dot like and linear adhesions of components in the interior area. Acrylate sealing substances/adhesives and silicone sealing substances are what is meant here.

Achieved quality level in DGNB ENV 1.2 Row 12 for the entire product:

| EGOSILICON 351 | Quality level 4 |
|--|-----------------|
| Achieved quality level in DCND ENV 1.2 Dev 12: | |

Quality level 4

Yes

Achieved quality level in DGNB ENV 1.2 Row 12:

| EGOSILICON | 351 |
|------------|-----|
|------------|-----|

Adhesives and sealants (acrylate, silicone, SMP) - interior and technical building equipments (DGNB ENV1.2 Row 12):

| First of able vin stad a surffing (OD). | |
|---|--|

Free of chlorinated paraffins (CP): EGOSILICON 351

| Content of solvent < 1 %: | |
|---------------------------|-----|
| EGOSILICON 351 | Yes |

| Content of solvents: | |
|----------------------|--|

| EGOSILICON 351 | 0 % |
|----------------|-----|
| | |

Free (< 0,1 %) of KWS plasticizers:

| EGOSILICON 351 | Yes |
|----------------|-----|

Row 13: Assembly adhesives and sealants on the facade, windows and exterior doors (provided by the customer). -Adhesive for the production of airtightness on the facade inside and outside: e.g. PU, PU hybrid, MS polymer, SMP or similar.

Achieved quality level in DGNB ENV 1.2 Row 13 for the entire product:

| EGOSILICON 351 | Quality level 4 |
|--|-----------------|
| Achieved quality level in DGNB ENV 1.2 Row 13: | |
| EGOSILICON 351 | Quality level 4 |

Adhesives and sealants (PU, PU hybrid, MS polymer, SMP or the like) - on the façade, windows and external doors (DGNB ENV1.2 Row 13):

| EGOSILICON 351 | Yes |
|-----------------------|-----|
| Content of VOC < 1 %: | |
| EGOSILICON 351 | Yes |
| Content of VOC: | |
| EGOSILICON 351 | 0 % |



EGOSILICON 351

Certified with EMICODE EC1/EC1PLUS, EC1-R/EC1PLUS-R:

| EGOSILICON 351 | Yes |
|-----------------------------|-----|
| | |
| Certified EMICODE standard: | |

EMICODE EC1

© Assessment Service of Building Material Scout / www.building-material-scout.com / Date: 09.10.2023



Contact Details Manufacturer

EGO Dichtstoffwerke GmbH & Co. Betriebs KG

Kaltenbrunn 27 82467 Garmisch-Partenkirchen DE http://www.ego.de/



Disclaimer

This verification is the evaluation and ranking of products in terms of the certification system DGNB 2015 (New construction of office buildings). The DGNB (Deutsche Gesellschaft für Nachhaltiges Bauen) generally does not certify products. Therefore the project team or the manufacturer is responsible to declare compliance with respect to the DGNB criteria. Notice: This verification is generated by the Assessment Service of BMS. The distribution or publication by third parties is not permitted. The data sheet is not a DGNB certification document. The information is based on the manufacturer's specifications. Despite a diligent treatment of all information BMS can not make any warranties about the completeness, reliability and accuracy of this information. The requirements of DGNB can be interpreted differently and depend on the project and scope of application. Therefore, BMS cannot accept any liability for the evaluation in terms of the DGNB criteria. The user of the data sheet, the user / purchaser of the product and the consultant / planner, who is advising on this product has the duty to check the product for the intended application at their own responsibility. When a new version of this product verification is produced, the previous version loses its validity.