

Product Verification

Sustainability

Self declared according to LEED Building Design and Construction V3 (2009)

Product Systems

EGO SMP 805

EGO Dichtstoffwerke GmbH & Co. Betriebs KG

EGO SMP 805 is a single-component, odourless adhesive & sealant that cures with the humidity in the air to form an elastic end product. It does not contain solvents, is free from silicone and isocyanite and provides high resistance against chemicals. For bonding and sealing in the field of construction and industry, for both indoor and outdoor applications, e.g. in metal, roof, camper van and concrete construction. Sealing for elastic connection joints in buildings and pedestrian paths. Can also be used on plaster, gypsum, ceramics, timber, glass, enamel, zinc, lead, stainless steel, HPL high-pressure laminates, hard PVC, aluminium, galvanised sheet metal, fibre-reinforced cement and various plastic substrates. Well suited for bonding of construction foils, rails/strips and panels. If to be used with porous natural stone or some types of plastics, such as PA, PS, EPDM, please perform your own application-related tests and trials or consult us. EGO SMP 805 fulfills the requirements according to EMICODE EC 1 PLUS.

<https://www.ego.de/produkt/egosmp805>



■ Product Assessment

Indoor Environmental Quality

Criteria

Product Verification

IEQ Credit 4.1: Low Emitting Materials: Adhesives and Sealants	Yes
--	-----

Legend: yes = Product contributes toward satisfying the credit, N/A = Product not relevant in the credit, no = Credit requirements are not proven

■ Summary

The product contributes to the certification:

- The entire product contributes toward satisfying IEQ Credit 4.1: Low Emitting Materials: Adhesives and Sealants: Yes

■ Ecolabels & Product-Assessments

AgBB tested



EMICODE

EMICODE EC1plus




EPD



EPD Institut Bauen und
Umwelt e.V.



French VOC-Label A+



ISO 14001 - Environmental
Management System



ISO 9001 - Quality
Management System



SCAQMD 1168



■ Product Properties

Ingredients:

Percentage of the product's composition, that is known to the chemical ingredient level	100 wt%
SVHC according REACH < 0,1 %:	Yes
Free (< 0,1 %) of chlorinated paraffins (= CP inkl. SCCP, MCCP, LCCP):	Yes
Content of solvents:	0 %
Free (< 0,1 %) of hydrocarbon (KWS) plasticizer:	Yes
Free (< 0,1 %) of polybrominated diphenyl ethers (= PBDE):	Yes
Free (< 0,1 %) of biocidal:	Yes
VOC content according 2004/42/EG:	0 g/l
VOC content according 2004/42/EG:	0 g/m2
Recycled content pre-consumer:	N/A
Recycled content post-consumer:	N/A
To what level of detail is the product composition known?	100 ppm
Rapidly renewable content	N/A
Non renewable virgin raw material content	N/A

Free (< 0,1 %) of polybrominated biphenyls (= PBB):	Yes
Free (< 0,1 %) of hexabromocyclododecane (= HBCD):	Yes
Free (< 0,1 %) of tris (2-carboxyethyl) phosphine (= TCEP):	Yes
Free (< 0,1 %) of lead:	Yes
Free (< 0,1 %) of cadmium:	Yes
Free (< 0,1 %) of chromium-VI compounds:	Yes
Free of solvent according to VdL-RL01:	Yes
Free (< 0,1 %) of aromatic compounds:	Yes
Free (< 0,1 %) from halogenated propellants:	Yes
Free (< 0,1 %) of halogenated flame retardants:	Yes
Content of VOC:	0 %
Free (< 0,1 %) of halogens:	Yes

Manufacturer:

Environmental Management System according ISO 14001:	Yes
Final manufacturing location of the product: latitude	47,4902251743193 ° DDD
Final manufacturing location of the product: longitude	11,177539584701767 ° DDD

Emissions:

Formaldehyde emissions after 28 days according DIN EN 717-1:	0,002 mg/m ³
Carcinogens 1A and 1B after 28 days according ISO-16000 / AgBB:	0,001 mg/m ³
R-Value according to AgBB:	0,00
TVOC after 3 days according ISO 16000-3 / AgBB:	0,005 mg/m ³
TVOC after 28 days according ISO 16000-3 / AgBB:	0,005 mg/m ³
SVOC after 3 days according ISO 16000-3 / AgBB:	0,005 mg/m ³
SVOC after 28 days according ISO 16000-3 / AgBB:	0,005 mg/m ³
Carcinogens 1A and 1B after 3 days according ISO-16000 / AgBB:	0,001 mg/m ³

Life Cycle Assessment:

Functional use period	N/A
-----------------------	-----

Circularity:

Other:

test

N/A


■ System description

The American LEED (Leadership in Energy and Environmental Design) certification system was published by the USGBC (U.S. Green Building Council) in the late 1990s. The LEED system can be used internationally for all buildings, regardless of whether it is a new building, refurbishment or existing building. In LEED v3 a total of seven environmental categories with different credits are considered, in which up to 110 points can be collected. The LEED levels of certification which can be achieved are Certified, Silver, Gold and Platinum. Up to now, more than 92,000 LEED projects have been registered in 167 countries, of which 39,000 have already achieved a certificate (as of October 2017).

Source: www.usgbc.org

■ System categories

Category Weighting

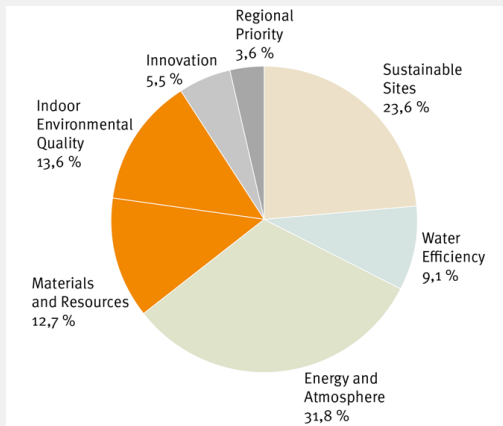

Category

Category considered in product verification

Sustainable Sites (SS)	No
Water Efficiency (WE)	No
Energy and Atmosphere (EA)	No
Materials and Resources (MR)	Yes
Indoor Environmental Quality (EQ)	Yes
Innovation (IN)	No
Regional Priority (RP)	No

Source: LEED 2009 - New Construction

Detailed Verification

Self declared according to LEED Building Design and Construction V3 (2009)

Indoor Environmental Quality

IEQ Credit 4.1: Low Emitting Materials: Adhesives and Sealants

The entire product contributes toward satisfying IEQ Credit 4.1: Low Emitting Materials: Adhesives and Sealants:

EGO SMP 805	Yes
-------------	-----

The product contributes toward satisfying IEQ Credit 4.1: Low Emitting Materials: Adhesives and Sealants:

EGO SMP 805	Yes
-------------	-----

The product is an adhesive or sealant:

EGO SMP 805	Yes
-------------	-----

The adhesive or sealant is wet applied on the construction site:

EGO SMP 805	Yes
-------------	-----

The application of the product is inside a building:

EGO SMP 805	Yes
-------------	-----

The application of the product is outside of a building:

EGO SMP 805	Yes
-------------	-----

VOC product type for adhesives & sealants according to LEED v3:

EGO SMP 805	Multipurpose construction adhesives
-------------	-------------------------------------

VOC limit (adhesives & sealants) according to LEED v3 - Limit:

EGO SMP 805	70
-------------	----

VOC limit (adhesives & sealants) according to LEED v3 - Unit:

EGO SMP 805	g/l
-------------	-----

VOC Limit (adhesives & sealants) according to LEED v3 - Standard:

EGO SMP 805	SCAQMD Rule 1168 (effective date of July 1, 2005 and rule amendment date of January 7, 2005)
-------------	--

VOC content of product (less water):

EGO SMP 805	27.86 g/l
-------------	-----------

VOC content of product (less water):

EGO SMP 805	1.82 %
-------------	--------

Other remarks on classification of LEED v3 Low Emitting Materials:

EGO SMP 805	Nein
-------------	------

■ Contact Details Manufacturer

EGO Dichtstoffwerke GmbH & Co. Betriebs KG

Kaltenbrunn 27
82467 Garmisch-Partenkirchen
DE
<http://www.ego.de/>



■ Disclaimer

This verification is the evaluation and ranking of products in terms of the certification system LEED 2009 (Building Design and Construction). The USGBC (U.S. Green Building Council) generally does not certify products. Therefore the project team or the manufacturer is responsible to declare compliance with respect to the LEED criteria. Notice: This verification is generated by the Assessment Service of BMS. The distribution or publication by third parties is not permitted. The data sheet is not a LEED certification document. The information is based on the manufacturer's specifications. Despite a diligent treatment of all information BMS can not make any warranties about the completeness, reliability and accuracy of this information. The requirements of LEED can be interpreted differently and depend on the project and scope of application. Therefore, BMS cannot accept any liability for the evaluation in terms of the LEED criteria. The user of the data sheet, the user / purchaser of the product and the consultant / planner, who is advising on this product has the duty to check the product for the intended application at their own responsibility. When a new version of this product verification is produced, the previous version loses its validity.