

EGOFIX PUTTY GUN


Thanks to the robust design of the EGOFIX PUTTY GUN it is suitable for 2.5 kg putty content (filled from buckets or packed in billets) with a diameter of 70 mm.

APPLICATION NOTES

The application pressure must be maximum 20 bar, which makes the gun suitable for viscous-plastic glazing putties.

CONSISTING OF

- cylinder with securing ring and a piston (the securing ring prevents unwanted ejection of the piston)
- Two-way valve with quick-acting coupling and hose connection.
- 1 nozzle head
- 1 S set of nozzles (= 4 pcs.) with various nozzle cross sections
- special nozzles available on request

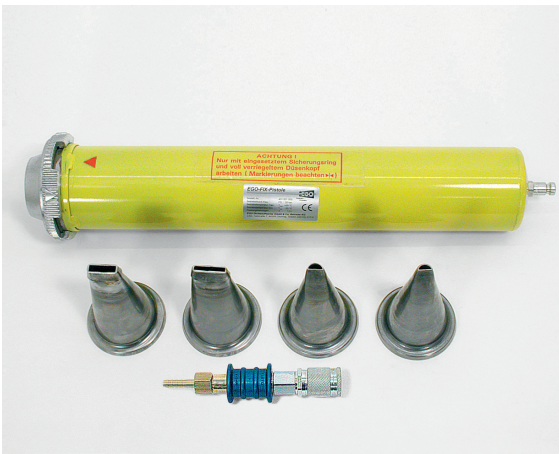

For warnings refer to the Safety Data Sheet. The above information is the result of thorough research; previous information is hereby invalidated. Check for yourself whether the product is suitable for your purposes. Our possible liability is limited to the value of our product as such. We cannot accept any liability for indirect damage, in particular for the application or unusability of the product. No one is authorized to make recommendations or assurances on our behalf that go beyond the content of our information sheets.